


QuickSpecs

HP ProLiant DL580 Generation 7 (G7)


Overview

Traditionally, mission-critical RAS (Reliability, Availability and Serviceability) features have been associated with RISC (Reduced Instruction Set Computing) systems. HP has designed an eco-system of RAS functionalities that has raised the bar for the HP ProLiant DL580 G7. The HP ProLiant DL580 G7 continues to deliver best-in-class HP performance, manageability, and reliability features with the latest Intel processor technology and it is the ideal choice for customers that are ready to deploy Large Databases that require scale-up compute processing, large memory and I/O intensive applications.

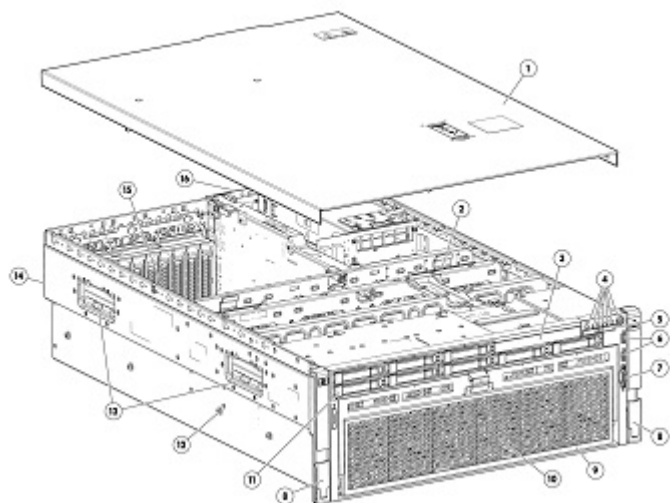

Front View:

1. Quick Removal Access Panel
2. 4 Hot Plug Redundant Fans Standard on all models
3. HP Slim SATA DVD ROM Optical Drive
4. Front Panel LED Display and Power Button
5. Slide-out Systems Insight Display
6. Two front accessible USB 2.0 ports
7. One front video port
8. Quick release levers for fast server access
9. Front accessible Processor and memory drawer
10. Support for up to four Intel® Xeon® Processors
11. Support for up to 8 Small Form-Factor (SFF) SAS, Serial ATA (SATA) or SSD drives
12. Universal Tool-less "Snap In" Sliding Rail Solution
13. Server Lifting Handles
14. 4U (7" Height) Rack Form Factor
15. Up to 11 slots supported; all full-length/full-height

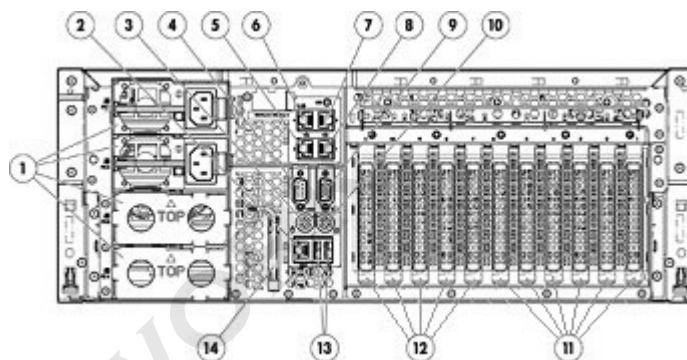

Rear View:

1. Hot Plug Redundant Power Supplies (2 or 4 depending on the model)
2. Integrated Lights-Out 3 port
3. Mouse port
4. Serial Port
5. Gigabit NIC Ports
6. Gigabit NIC Ports
7. Gigabit NIC Ports
8. Gigabit NIC Ports
9. Video Port
10. Keyboard port
11. PCI-Express or PCI-X option (slots 1-6)
12. PCI-Express slots (slots 7-11)
13. Two USB ports
14. Service tool



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Overview

What's New

- Support for new HP hard drive

More Performance

- Supporting up to 40 Cores and 80 threads (10 cores/20 threads per CPU); 30MB shared cache with the introduction of the new Intel® Xeon® Processor E7 series

More Expandable

- 2X memory capacity, supporting up to 2.0TB (32GB DDR3 DIMMs)* and support for a new (E7) Memory Cartridge*

More Reliable

- Double Device Data Correction - DDDC*, this feature extends the capability to withstand failures in two x4 DRAM devices. Systems supporting DDDC can fix both single- and double-DRAM device memory hard errors. This feature greatly extends system up-time

More Efficient

- Support for Low Voltage DIMMS*

More Secured

- Trusted Execution Technology - TXT*
- Advanced Encryption Standard-New Instructions (AESNI)*

* These new features applicable only to the Intel® Xeon® Processor E7 series



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Standard Features

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

Processor

One or more of the following depending on model

Ten-Core Processors

Intel® Xeon® E7-4870 (2.40GHz/10-core/30MB/130W) Processor

Intel® Xeon® E7-4860 (2.26GHz/10-core/24MB/130W) Processor

Intel® Xeon® E7-4850 (2.00GHz/10-core/24MB/130W) Processor

Intel® Xeon® E7-8867L (2.13GHz/10-core/30MB/105W) Processor

Eight-Core Processors

Intel® Xeon® E7-8837 (2.67GHz/8-core/24MB/130W) Processor

Intel® Xeon® E7-4830 (2.13GHz/8-core/24MB/105W) Processor

Intel® Xeon® E7-4820 (2.0GHz/8-core/18MB/105W) Processor

Intel® Xeon® X7560 (2.26GHz/8-core/24MB/130W) Processor

Intel® Xeon® X7550 (2.0GHz/8-core/18MB/130W) Processor

Intel® Xeon® L7555 (1.86GHz/8-core/24MB/95W) Processor

Six-Core Processors

Intel® Xeon® E7-4807 (1.86GHz/6-core/18MB/95W) Processor

Intel® Xeon® E7540 (2.0GHz/6-core/18MB/105W) Processor

Intel® Xeon® E7530 (1.86GHz/6-core/12MB/105W) Processor

Intel® Xeon® X7542 (2.66GHz/6-core/18MB/130W) Processor

Quad-Core Processors

Intel® Xeon® E7520 (1.86GHz/4-core/18MB/95W) Processor

NOTE: New Intel Microarchitecture with Intel Virtualization Technology FlexMigration. Industry Standard Intel® 7500 Chipset with four high-speed interconnects up to 6.4GT/s.

Cache Memory

One of the following depending on model

30MB (1 x 30MB) Level 3 cache

NOTE: E7-8867L E7-4870, Processors

24MB (1 x 24MB) Level 3 cache

NOTE: E7-8837, E7-4860, E7-4850, E7-4830, X7560, L7555 Processors

18MB (1 x 18MB) Level 3 cache

NOTE: E7-4820, E7-4807, X7550, E7540, X7542, E7520 Processors

12MB (1 x 12MB) Level 3 cache

NOTE: E7530 Processor

Chipset

Industry Standard Intel® 7500 Chipset

NOTE: For more information regarding Intel chipsets, please see the following URL:

<http://www.intel.com/products/server/chipsets/>

Upgradeability

Upgradeable to quad (4) processors



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Standard Features

Memory Protection Advanced ECC
 Double Data Device Correction - DDDC
NOTE: Intel® Xeon® Processor E7 series powered only.
 Mirrored Memory
 Online Spare Memory

Memory Type PC3-10600R DIMMs (DDR3)
 One of the following depending on Model
 Standard (2P Models) 16GB (4 x 4GB)
 Standard (4P Model - E7540) 32GB (8 x 4GB)
 Standard (4P Models - X7560, X7550) 64GB (16 x 4GB)
 Standard (2P Models - E7-4830, E7-4807) 64 (8 x 8GB)
 Standard (4P Models - E7-4870, E7-4850) 128GB (16 x 8GB)
 Maximum 2TB (64 x 32GB)*
 * Intel® Xeon® Processor E7 series powered only, 1TB max on 7500 series

Network Controller HP NC375i Integrated Quad Port Gigabit Server Adapter
NOTE: Optional Dual Port 10GbE upgrade (replaces two 1G ports)

Expansion Slots

NOTE: Up to 11 slots supported; all full-length/full-height. Standard: 2 PCI-E 2.0 x8, 3 PCI-E 2.0 x4.

NOTE: The primary video controller needs to be located in the Main I/O board slots 7-11 providing video during boot. A video controller installed in an I/O expansion slot 1-6 cannot be the primary controller. It will not have video during boot but will provide video once OS and drives load.

| Expansion Slots (Main IO Board standard) | Expansion Slot # | Technology | Width | Connector Width* | Bus / Dev Number** | Form Factor | Notes |
|--|------------------|------------------|-------|------------------|--------------------|-------------|-------|
| | 1 | N/A | N/A | N/A | N/A | N/A | N/A |
| | 2 | N/A | N/A | N/A | N/A | N/A | N/A |
| | 3 | N/A | N/A | N/A | N/A | N/A | N/A |
| | 4 | N/A | N/A | N/A | N/A | N/A | N/A |
| | 5 | N/A | N/A | N/A | N/A | N/A | N/A |
| | 6 | N/A | N/A | N/A | N/A | N/A | N/A |
| | 7 | PCI Express Gen2 | x4 | x8 | 0/0A | FH/FL | |



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Standard Features

| | | | | | |
|----|------------------|----|-----|------|-------|
| 8 | PCI Express Gen2 | x4 | x8 | 0/09 | FH/FL |
| 9 | PCI Express Gen2 | x8 | x16 | 0/07 | FH/FL |
| 10 | PCI Express Gen2 | x4 | x8 | 0/01 | FH/FL |
| 11 | PCI Express Gen2 | x8 | x16 | 0/05 | FH/FL |

* Default bus assignment. Inserting cards with PCI bridges may alter the actual bus assignment number.

** Slots are enumerated differently based on OS. MS OS's enumerate from lowest to highest Device ID by bus (starting with the lowest bus).

FL= Full length; FH = Full height; LP = low-profile.

Expansion Slots

| Expansion Slots with IO Expander (combination PCI-X, PCI-e and 300W GPU) | Expansion Slot # | Technology | Width | Connector Width* | Bus / Dev Number** | Form Factor | Notes |
|--|------------------|------------------|--------|------------------|--------------------|-------------|--------|
| | 1 | PCI-X | 64-bit | N/A | 82/01 | FH/FL | 100MHz |
| | 2 | PCI-X | 64-bit | N/A | 82/02 | FH/FL | 100MHz |
| | 3 | PCI Express Gen2 | x16 | x16 | 80/07 | FH/FL | |
| | 4 | PCI Express Gen2 | x4 | x8 | 80/01 | FH/FL | |
| | 5 | N/A | N/A | N/A | N/A | N/A | N/A |
| | 6 | PCI Express Gen2 | x16 | x16 | 80/03 | FH/FL | |
| | 7 | PCI Express Gen2 | x4 | x8 | 0/0A | FH/FL | |
| | 8 | PCI Express Gen2 | x4 | x8 | 0/09 | FH/FL | |
| | 9 | PCI Express Gen2 | x8 | x16 | 0/07 | FH/FL | |
| | 10 | PCI Express Gen2 | x4 | x8 | 0/01 | FH/FL | |
| | 11 | PCI Express Gen2 | x8 | x16 | 0/05 | FH/FL | |

* Default bus assignment. Inserting cards with PCI bridges may alter the actual bus assignment number.

** Slots are enumerated differently based on OS. MS OS's enumerate from lowest to highest Device ID by bus (starting with the lowest bus).

FL= Full length; FH = Full height; LP = low-profile.

Expansion Slots



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Standard Features

| Expansion Slots with I/O Expander (standard PCI-e option) | Expansion Slot # | Technology | Width | Connector Width* | Bus / Dev Number** | Form Factor | Notes |
|---|------------------|------------------|-------|------------------|--------------------|-------------|-------|
| | 1 | PCI Express Gen1 | x4 | x8 | 80/00 | FH/FL | |
| | 2 | PCI Express Gen2 | x8 | x16 | 80/09 | FH/FL | |
| | 3 | PCI Express Gen2 | x8 | x16 | 80/07 | FH/FL | |
| | 4 | PCI Express Gen2 | x4 | x8 | 80/01 | FH/FL | |
| | 5 | PCI Express Gen2 | x8 | x16 | 80/05 | FH/FL | |
| | 6 | PCI Express Gen2 | x8 | x16 | 80/03 | FH/FL | |
| | 7 | PCI Express Gen2 | x4 | x8 | 0/0A | FH/FL | |
| | 8 | PCI Express Gen2 | x4 | x8 | 0/09 | FH/FL | |
| | 9 | PCI Express Gen2 | x8 | x16 | 0/07 | FH/FL | |
| | 10 | PCI Express Gen2 | x4 | x8 | 0/01 | FH/FL | |
| | 11 | PCI Express Gen2 | x8 | x16 | 0/05 | FH/FL | |

* Default bus assignment. Inserting cards with PCI bridges may alter the actual bus assignment number.

** Slots are enumerated differently based on OS. MS OS's enumerate from lowest to highest Device ID by bus (starting with the lowest bus).

FL= Full length; FH = Full height; LP = low-profile.

Storage Controller

One of the following depending on Model

Base Models HP Smart Array P410i/512 MB FBWC Controller

High Performance Models HP Smart Array P410i/1G FBWC Controller

The Flash Backed Write Cache (FBWC) increases cache data retention capabilities from two days of existing battery backed write cache (BBWC) to infinite data retention.

- Standard on all Models
- Transportable data protection
- Increases overall controller performance



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Standard Features

| | | |
|--------------------------|---------------------------|--|
| Internal Storage Devices | Diskette Drive | None |
| | Optional Optical Drive | HP Slim SATA DVD ROM Optical Drive NOTE: Standard on Xeon Processor 7500 series models and CTO chassis |
| | Hard Drives | None ship standard |
| | Hard Disk Drive Backplane | Internal SAS backplane supports up to eight SFF hard disk drives |

| | | | |
|--------------------------|-----------------------|-------|-----------|
| Maximum Internal Storage | Hot Plug SFF SAS | 8.0TB | 8 x 1TB |
| | Hot Plug SFF SATA | 8.0TB | 8 x 1TB |
| | Hot Plug SFF SSD | 960GB | 8 x 120GB |
| | Hot Plug SFF SAS SSD | 6.4TB | 8 x 800GB |
| | Hot Plug SFF SATA SSD | 3.2TB | 8 x 400GB |

NOTE: There is an extra internal SSD slot available as well.

| | | |
|------------|-------------------------|--|
| Interfaces | Serial | 1 |
| | Video | 1 front; 1 rear |
| | Network RJ-45 | 4 |
| | iLO 3 Remote Management | 1 |
| | Keyboard | 1 |
| | Pointing Device (Mouse) | 1 |
| | SD Slot | 1 |
| | USB 2.0 Ports | 6 total: 2 front; 2 rear; 2 internal NOTE: Please see the following URL for additional information regarding USB support: http://h18004.www1.hp.com/products/servers/platforms/usb-support.html |

| | |
|------------------------------|--|
| Industry Standard Compliance | ACPI 2.0. Compliant |
| | PCIe 2.0 Compliant |
| | PXE Support |
| | WOL Support |
| | Physical Address Extension (PAE) Support |
| | Microsoft® Logo certifications |
| | USB 2.0 Support |

| | |
|--------------------|--|
| Server Power Cords | NOTE: If customers require a local power cord, they can check the power cord matrix for the appropriate county specific sku. Please see the following power cord matrix for details: http://www.hp.com/go/powercordmatrix |
|--------------------|--|



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Standard Features

Power Supply

One of the following depending on Model

HP 1200W Common Slot Platinum Hot Plug Power Supply Kit

(NOTE: Supported on the E7-4870, E7-4850, E7-4830 and E7-4807 Models)

HP 1200W Common Slot Silver Hot Plug Power Supply Kit

(NOTE: Supported on the X7560, X7550, E7540, E7530, E7520 Models)

NOTE: Two Hot Plug Power Supplies ship standard with 2P Models. Four Hot Plug Power Supplies ship standard with 4P Models.

Power Supply Requirement Override

NOTE: The HP ProLiant DL580 G7 does an inventory of the system configuration to determine what level of redundancy the power supply configuration supports based on some configuration assumptions. The level of redundancy will be reported during the system power on. For planning purposes you can use the Power Advisor (www.hp.com/go/proliant-energy-efficient or www.hp.com/go/hppoweradvisor) which is more accurate to determine the power requirements. Also, there is an RBSU override switch capability that allows the user to override the base setting if the Power Advisor indicates redundancy with their configuration.

System Fans

Four Hot Plug redundant fans standard (3+1)

Operating Systems and Virtualization Software Support for ProLiant Servers

Microsoft Windows Server

Red Hat Enterprise Linux (RHEL)

SUSE Linux Enterprise Server (SLES)

Oracle Solaris

VMware

Citrix XenServer

NOTE: For more information on HP's Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server, please visit our Support Matrix at: <http://www.hp.com/go/ossupport> and our driver download page www.hp.com/support/DL580G7

Graphics

Integrated ATI ES1000 with 64MB embedded video SDRAM

Max Resolution 1280 x 1024 x 16M color

Form Factor

Rack (4U = 7 inches), ships with Quick Deploy Sliding Rail System, an ambidextrous cable management arm and quick release levers for fast and easy serviceability and in-rack tool-less access to major components.

Space saving form factor (4U) provides space efficiencies while providing maximum deployment flexibility.



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Standard Features

HP Insight management software HP Insight Foundation Managing the growing number of servers can be complex and expensive for your organization. IT managers need to address changing business needs with tools that meet the challenges of managing today's complex Datacenters.

HP provides management solutions that are designed to simplify a server's installation, configuration and maintenance throughout the entire server lifecycle. This provides the customer with higher levels of operational efficiency and highly reliable systems: www.hp.com/go/foundation.

The foundation pack includes:

- HP SmartStart
- HP Management DVD
- HP ProLiant Smart Update Firmware DVD

SmartStart version supported (minimum): SmartStart 8.50
<http://www.hp.com/servers/smartstart>

NOTE: In an effort to support reducing our environmental impact, the HP Insight Foundation Suite for ProLiant media will be available as a selectable option for this server at time of order of a CTO SKU. This will allow customers to order the number of media kits that best meet their needs and eliminate receiving unnecessary duplicate media.

HP Integrated Lights-Out (iLO) HP Integrated Lights-Out (iLO) simplifies server setup, health monitoring, power and thermal control, and lights-out remote administration of ProLiant ML, DL, and BL servers. HP iLO functions without additional software and can be accessed from any location via a web browser. HP iLO works hand-in-hand with HP Systems Insight Manager, Insight Control and Insight Dynamics for ProLiant, helping customers unleash the value of the ProLiant platform and deliver the highest possible quality of IT service. For more information, visit: www.hp.com/go/iLO

Intelligent Manageability HP Systems Insight Manager
 SmartStart
 Redundant ROM
 Remote Flash ROM
 Management Agents
 Integrated Management Log (IML)
 Automatic Server Recovery-2 (ASR-2)
 ROM-Based Setup Utility (RBSU)
 Dynamic Sector Repairing (with Smart Array Controllers)
 Drive Parameter Tracking (with Smart Array Controllers)
 Pre-Failure Warranty (covers processors, SAS hard drives and memory)
 Redundant/adaptive load balancing NIC Support
 Hot Spare Boot

NOTE: Upon the event of a failed processor in a multi-processing environment, the system will automatically reboot and use the remaining good processor(s).



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Standard Features

| | |
|----------|--|
| Security | Power-on password Keyboard password External USB port enable/disable Network Server Mode Serial interface control Administrator's password Removable optical drive |
|----------|--|

Warranty

This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

NOTE: Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have HP replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at: <http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Optional Features

HP Insight management software HP Insight Control

HP Insight Control, a product option, delivers essential infrastructure management that can help save time and money by making it easy to deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console.

Two versions of Insight Control are available, to serve environments requiring either a Linux-based or a Windows-based central management server: HP Insight Control for Linux, and HP Insight Control. See www.hp.com/go/insightcontrol

HP Insight Control includes one year of 24 x 7 HP Software Technical Support and Update Service ensuring rapid access to HP support staff and proactive delivery of software updates. For more information about this service, please visit: <http://www.hp.com/services/insight>.

HP Insight Dynamics for ProLiant

HP Insight Dynamics for ProLiant, a product option, is an integrated command center that enables IT Staff personnel to continuously analyze and optimize a converged infrastructure, while automating and reducing the cost of common data center tasks by as much as 40 percent. As a powerfully integrated by design toolkit to accelerate complex technology projects and simplify daily operations that ultimately enable IT Staff personnel to dynamically keep pace with the organizations changing business requirements. It enables them to plan capacity and power continuously, balance across physical and virtual resources, and ensure cost-effective high availability. It also enables IT organizations to provision infrastructure consistently and automatically from pools of shared resources using a self-service portal. Resources provisioned can range from a single virtual machine to complex multi-tier environments and their associated physical and virtual resource requirements. In addition to the previous functional benefits, it also provides a cost-effective disaster recovery for physical and virtual environments that works with HP Continuous Access software for both the Enterprise Virtual Array and the XP storage array allowing application environments to be reactivated in minutes with the touch of a button to a remote location.

NOTE: For more information, visit: <http://www.hp.com/go/insightdynamics>



Optional Features

Solutions

The ProLiant DL580 G7 server is an enterprise class, 4 socket server designed for maximum scalability and high availability. Its innovative chassis offers unsurpassed flexibility and serviceability in a versatile form factor. Based upon the latest industry standard processing, memory, I/O and networking technologies, the ProLiant DL580 G7 provides the highest levels of performance demanded by today's compute intensive applications. Unparalleled high availability features, including hot-plug and redundant components, guarantee maximum uptime. HP Integrated Lights-Out 3 (iLO3) technology allows remote administration from a standard web browser without ever having to visit the server. Within the 4U dense form factor, it's highly expandable architecture provides maximum application deployment flexibility with the ability to add PCI-Express, PCI-X, 2 - 10GB NICs and battery-backed write cache options. Innovative features, such as the ability to access processors, memory, hard drives, and power supplies while the unit remains secured in the rack, enable rapid response to service events, radically decreasing overall IT costs and server downtime.

Typical Usage:

Space-constrained corporate data centers and service providers
Network and I/O expandability, inbuilt availability and reliability features, advanced power management capabilities and large internal storage make DL580 G7 ideal for corporate datacenters.

Database, Messaging and Business Applications

Large internal storage, refined I/O slots options, high network bandwidth, new DDR3 expandable memory combined with latest Intel 8-core expandable processors in DL580 G7 provide everything necessary for today's database, messaging and business applications.

Virtualization and Consolidation

HP's 4S architecture, inbuilt advanced reliability and scalability features make DL580 G7 a perfect platform for virtualization and consolidation solutions. HP's Insight control offerings make it easy to manage, deploy and migrate virtualized servers with VMware or Microsoft® Virtual Server. For more solutions visit: <http://www.hp.com/solutions/proliantdl580>.

High Performance Clusters

- | | |
|-------------------------------|--|
| HP Cluster Platforms | HP Cluster Platforms are specifically engineered, factory-integrated large-scale ProLiant clusters optimized for High Performance Computing, with a choice of servers, networks and software. Operating system options include specially priced offerings for Red Hat Enterprise Linux and SUSE Linux Enterprise Server, as well as Microsoft Windows HPC Server. A Cluster Platform Configurator simplifies ordering. http://www.hp.com/go/clusters |
| HP HPC Interconnects | High Performance Computing (HPC) interconnect technologies are available for this server as part of the HP Cluster Platform portfolio. These high-speed InfiniBand and Gigabit interconnects are fully supported by HP when integrated within an HP cluster. Flexible, validated solutions can be defined with the help of configuration tools. http://www.hp.com/techservers/clusters/ucp/index.html |
| HP Cluster Management Utility | HP Cluster Management Utility (CMU) is an HP-licensed and HP-supported suite of tools that are used to manage large-scale Linux ProLiant systems. CMU includes software for the centralized provisioning, management and monitoring of nodes. CMU makes the administration of clusters user friendly, efficient, and effective. http://www.hp.com/go/cmu |
| HP HPC Linux Value Pack | HP HPC Linux Value Pack (Value Pack) is an HP-licensed and HP-supported specially priced software bundle for the development and deployment of applications on HPC Cluster Platforms. Value Pack includes the Platform HPC Enterprise Edition suite of tools including the LSF workload scheduler, |



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Optional Features

the HP-MPI parallelization library. Also included are the HP Unified Parallel C compiler and the HP Shmem library, as well as the execution environments for the libraries and compiler. [HP HPC Linux Value Pack](#)

Factory Express Portfolio for Servers and Storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSAxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to: <http://www.hp.com/go/factory-express>.

HP Enterprise Configurator

The HP eConfigure-Enterprise Configurator now provides factory default racking for our HP hardware portfolio. This approach is aligned with our strategic direction to meet the needs and expectations of our valued customers. If you require "custom" rack configuration, please contact HP's Customer Business Center or an Authorized Partner for assistance. <http://www.hp.com/products/configurator>.



Service and Support

Service and Support

HP Technology Services for Industry Standard Servers and BladeSystem

Capitalizing on HP ProLiant server and HP BladeSystem capabilities requires a service partner who understands your increasingly complex business technology environment. That's why it makes sense to team up with the people who know HP infrastructure hardware and software best - the experienced professionals at HP Services.

What HP ProLiant and BladeSystem Services can do for you

HP ProLiant and BladeSystem Services can help you design, deploy, test, integrate, support, and manage IT and infrastructure solutions. This way, HP proposes services solutions that include more than just uplift of base warranty. You can get the support you need by choosing from one of a number of service packaged solutions we have designed to address wider set of customer support needs.

HP Technology Services meets business challenges with services offered in three packages -

Optimized Care Package, Standard Care Package, and Basic Care Package - available for each product group. Such packaged solutions enable customers to optimize technology operations, minimize risk and drive better business outcomes with easy-to-buy, easy-to-use scalable support packages for servers, storage, networking and software.

Optimized Care Package Supports maintaining servers at optimum performance availability

HP ProLiant Server Hardware Installation

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner
<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN>

HP Installation and Startup for SIM (Systems Insight Manager)

Provides for installation and configuration of the latest version of HP Systems Insight Manager, together with the installation and startup of HP Service Essentials Remote Support Pack
<http://h20195.www2.hp.com/v2/GetPDF.aspx/5982-4143EN.pdf>

3-Year HP Critical Advantage

Provides end-to-end infrastructure support solution for business critical applications running on virtualized/x86 infrastructures, enabling the customers to cost effectively build, operate, and continuously improve their IT environment
<http://h20195.www2.hp.com/V2/GetDocument.aspx?docname=4AA3-1772ENW>

Additional Services: Microsoft or Linux or VMware education courses + Facility & technology environmental assessment services + Energy Efficiency Design, Factory Express

Standard Care Package Package that maintains high level of server availability

HP ProLiant Server Hardware Installation

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner
<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN>

HP Installation and Startup for SIM (Systems Insight Manager)

Provides for installation and configuration of the latest version of HP Systems Insight Manager, together with the installation and startup of HP Service Essentials Remote Support Pack
<http://h20195.www2.hp.com/v2/GetPDF.aspx/5982-4143EN.pdf>

3-Year HP 6 hour Hardware Support Onsite Call-to-Repair Service



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Service and Support

Provides an IT manager with a team of support specialists who will quickly begin troubleshooting the system to help return the hardware to operating condition within 6 hours of the initial service request to the HP Global Solution Center

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5982-6547EN.pdf>

3-Year , HP 24x7 Software Support for Insight Control

Provides for the deployment and basic configuration of HP Insight Control on HP ProLiant ML and DL series servers or HP BladeSystem servers

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-6645EEE.pdf>

Additional Services: Software OS (Microsoft, Linux (SUSE/Red Hat) & VMware Installation & Start Up, and Software Support; Install and Startup Services for Insight Control; Microsoft or Linux or VMware education courses; +30 Proactive Select Credits, Factory Express

Basic Care Package

Basic Care Package: delivers minimum recommended support service level

HP ProLiant Server Hardware Installation

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner

<http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN>

3-Year HP 24x7 4 hour Response, Hardware Support Onsite Service

Provides for the deployment and basic configuration of HP Insight Control on HP ProLiant ML and DL series servers or HP BladeSystem servers

<http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA0-9972ENW.pdf>

Additional Services: Software OS (Microsoft, Linux (SUSE/Red Hat) & VMware Installation & Start Up and Software Support); +10 Proactive Select Credits, Factory Express

Insight Remote Support

The packages include HP Insight Remote Support that uses proven technology to deliver secure, reliable 24x7 remote monitoring, diagnoses, and problem resolution. It is available at no additional cost to all warranty, HP Care Pack Service, and service agreement customers.

For more information

To learn more on HP ProLiant servers and HP BladeSystem servers, please contact your HP sales representative or HP Authorized Channel Partner. Or visit: <http://www.hp.com/services/proliant>



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Pre-configured Models

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

NOTE: Pre-configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.

NOTE: HP does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.

NOTE: If you desire a custom configuration please see "Configuration Information - Factory Integrated Models" section of this QuickSpecs.

NOTE: Not all models are available in all regions. Check with your local country HP offices for availability.

High Performance Models

| | | |
|---|--|---|
| HP ProLiant DL580 G7 E7-4870 4P 128GB-R P410i/1G FBWC 4x1200W HE PS Server 643063-xx1 | Processor(s) Four of the following depending on model | (4) Intel® Xeon® E7-4870 (2.40GHz/10-core/30MB/130W) Processors (4) Intel® Xeon® E7-4850 (2.00GHz/10-core/24MB/130W) Processors (4) Intel® Xeon® X7560 (2.26GHz/8-core/24MB/130W) Processors (4) Intel® Xeon® X7550 (2.0GHz/8-core/18MB/130W) Processors (4) Intel® Xeon® E7540 (2.0GHz/6-core/18MB/105W) Processors |
| HP ProLiant DL580 G7 E7-4850 4P 128GB-R P410i/1G FBWC 4x1200W HE PS Server 643064-xx1 | Cache Memory One of the following depending on model Memory One of the following depending on model | 30MB (1 x 30MB) Level 3 cache 24MB (1 x 24MB) Level 3 cache 18MB (1 x 18MB) Level 3 cache 128GB (16 x 8GB DIMMs) PC3-10600R DIMMs (DDR3) installed in (8) (E7) Memory Cartridges (E7-4870, E7-4850 Models) 64GB (16 x 4GB DIMMs) PC3-10600R DIMMs (DDR3) installed in (8) memory boards (X7560, X7550 Models) 32GB (8 x 4GB DIMMs) PC3-10600R DIMMs (DDR3) installed in (4) memory boards (E7540 Models) |
| HP ProLiant DL580 G7 X7560 4P 64GB-R P410i/1GB FBWC 8 SFF 1200W RPS Perf IC Svr 584084-xx1 | Network Controller Storage Controller Hard Drives | HP NC375i Integrated Quad Port Gigabit Server Adapter Embedded HP Smart Array P410i/1G FBWC Controller None ship standard |
| HP ProLiant DL580 G7 X7550 4P 64GB-R P410i/1GB FBWC 8 SFF 1200W RPS Perf IC Svr 584085-xx1 | Internal Storage Optical Drive Power Supply One of the following depending on model | Up to 8.0TB of internal storage (SFF SAS) HP Slim SATA DVD ROM Optical Drive (4) HP 1200W Common Slot Platinum Hot Plug Power Supply Kit (E7-4870, E7-4850 Models) (4) HP 1200W Common Slot Silver Hot Plug Power Supply Kit (X7560, X7550, E7540 Models) |
| HP ProLiant DL580 G7 E7540 4P 32GB-R P410i/1GB FBWC 8 SFF 1200W RPS Perf IC Svr 584086-xx1 | Fans Integrated Lights Out Insight Control | Four Hot Plug redundant fans standard (3+1) Integrated Lights-Out 3 (iLO 3) ships standard HP Insight Control No Media single server license, including 1 year of 24x7 Technical Support and Updates |
| | Form Factor Warranty | Rack 4U Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response |



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Pre-configured Models

Base Models

| | | |
|--|---|---|
| <p>HP ProLiant DL580 G7 E7-4830 2P 64GB-R P410i/512 FBWC 2x1200W HE PS Server 643065-xx1</p> | <p>Processor(s) <i>Two of the following depending on model</i> Up to 4 supported</p> <p>Cache Memory <i>One of the following depending on model</i></p> <p>Memory</p> | <p>(2) Intel® Xeon® E7-4830 (2.13GHz/8-core/24MB/105W) Processors (2) Intel® Xeon® E7-4807 (1.86GHz/6-core/18MB/95W) Processors (2) Intel® Xeon® E7530 (1.86GHz/6-core/12MB/105W) Processors (2) Intel® Xeon® E7520 (1.86GHz/4-core/18MB/95W) Processors</p> <p>24MB (1 x 24MB) Level 3 cache 18MB (1 x 18MB) Level 3 cache 12MB (1 x 12MB) Level 3 cache</p> <p>64GB (8 x 8GB DIMMs) PC3-10600R DIMMs (DDR3) installed in (4) (E7) Memory Cartridges (E7-4830, E7-4807 Models) 16GB (4 x 4GB DIMMs) PC3-10600R DIMMs (DDR3) installed in (2) memory boards (E7530, E7520 Models)</p> |
| <p>HP ProLiant DL580 G7 E7-4807 2P 64GB-R P410i/512 FBWC 2x1200W HE PS Server 643066-xx1</p> | <p>Network Controller</p> <p>Storage Controller</p> <p>Hard Drives</p> <p>Internal Storage</p> <p>Optical Drive</p> | <p>HP NC375i Integrated Quad Port Gigabit Server Adapter</p> <p>Embedded HP Smart Array P410i/512 MB FBWC Controller</p> <p>None ship standard</p> <p>Up to 8.0TB of internal storage (SFF SAS)</p> <p>HP Slim SATA DVD ROM Optical Drive</p> |
| <p>HP ProLiant DL580 G7 E7530 2P 16GB-R P410i/512 FBWC 8 SFF 1200W RPS Base Server 584087-xx1</p> | <p>Power Supply <i>One of the following depending on model</i></p> <p>Fans</p> <p>Integrated Lights Out</p> <p>Form Factor</p> <p>Warranty</p> | <p>(2) HP 1200W Common Slot Platinum Hot Plug Power Supply Kit (E7-4830, E7-4807 Models) (2) HP 1200W Common Slot Silver Hot Plug Power Supply Kit (E7530, E7520 Models)</p> <p>Four Hot Plug redundant fans standard (3+1)</p> <p>Integrated Lights-Out 3 (iLO 3) ships standard</p> <p>Rack 4U</p> <p>Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response</p> |
| <p>HP ProLiant DL580 G7 E7520 2P 16GB-R P410i/512 FBWC 8 SFF 1200W RPS Base Server 595241-xx1</p> | | |

| | | |
|-------------------------|---------|--------|
| Country Code Key | xx = 00 | US |
| | xx = 20 | Brazil |
| | xx = 29 | Japan |
| | xx = 37 | APD |
| | xx = 42 | Europe |
| | xx = AA | PRC |



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Configuration Information - Factory Integrated Models

NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

NOTE: Configure-to-order (CTO) servers must start with a CTO Chassis.

NOTE: FIO indicates that this option is only available as a factory installable option.

Step 1: Base Configuration

| | |
|-----------|--|
| HP Models | <p>HP ProLiant DL580 G7 Configure-to-order Server 588857-B21</p> <p>Factory Integrated Models ship with:</p> <p>HP NC375i Integrated Quad Port Gigabit Server Adapter Two HP DL580G7 Memory Boards Five standard PCI-express slots HP Smart Array P410i/ Zero Memory Controller Four redundant hot-plug fans SFF SAS/SATA/SSD drive cage HP Slim SATA DVD-ROM Optical Drive HP Integrated Lights-Out 3 (iLO 3) management processor: integrated on system board Rack (4U), 7-inch</p> <p>NOTE: Power supplies need to be selected separately from Step 2 below. NOTE: Customer purchasing the Intel® Xeon® Processor 7500 series will need to purchase the HP DL580R07 CTO Server (PN 588857-B21)</p> |
| | <p>HP ProLiant DL580 G7 (E7) Configure-to-order Server 643086-B21</p> <p>Factory Integrated Models ship with:</p> <p>HP NC375i Integrated Quad Port Gigabit Server Adapter Four HP DL580G7/DL980 G7 (E7) Memory Cartridges Five standard PCI-express slots HP Smart Array P410i/ Zero Memory Controller Four redundant hot-plug fans SFF SAS/SATA/SSD drive cage HP Integrated Lights-Out 3 (iLO 3) management processor: integrated on system board Rack (4U), 7-inch</p> <p>NOTE: Power supplies need to be selected separately from Step 2 below. NOTE: Customers purchasing the Intel® Xeon® Processor E7 series will need to purchase the HP DL580R07 (E7) CTO Server (PN 643086-B21)</p> |

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

| | |
|---------------|--|
| HP Processors | <p>NOTE: If more than two processors are desired, select one xxxxx-L21 and additional processors would be xxxxx-B21. 3P configurations are not supported</p> <p>Ten-Core Processors</p> <p>HP DL580 G7 Intel® Xeon® E7-4870 (2.40GHz/10-core/30MB/130W) FIO 2-processor Kit 643067-L21</p> <p>NOTE: QPI speed is 6.40 GT/s</p> |
|---------------|--|



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Configuration Information - Factory Integrated Models

| | |
|---|------------|
| HP DL580 G7 Intel® Xeon® E7-4860 (2.26GHz/10-core/24MB/130W) FIO 2-processor Kit NOTE: QPI speed is 6.40 GT/s | 643069-L21 |
| HP DL580 G7 Intel® Xeon® E7-4850 (2.00GHz/10-core/24MB/130W) FIO 2-processor Kit NOTE: QPI speed is 6.40 GT/s | 643071-L21 |
| HP DL580 G7 Intel® Xeon® E7-8867L (2.13GHz/10-core/30MB/105W) FIO 2-processor Kit NOTE: QPI speed is 6.40 GT/s | 643079-L21 |
| Eight-Core Processors | |
| HP DL580 G7 Intel® Xeon® E7-8837 (2.67GHz/8-core/24MB/130W) FIO 2-processor Kit NOTE: QPI speed is 6.40 GT/s | 643081-L21 |
| HP DL580 G7 Intel® Xeon® E7-4830 (2.13GHz/8-core/24MB/105W) FIO 2-processor Kit NOTE: QPI speed is 6.40 GT/s | 643073-L21 |
| HP DL580 G7 Intel® Xeon® E7-4820 (2.0GHz/8-core/18MB/105W) FIO 2-processor Kit NOTE: QPI speed is 5.86 GT/s | 643075-L21 |
| HP DL580 G7 Intel® Xeon® X7560 (2.26GHz/8-core/24MB/130W) FIO 2-processor Kit NOTE: QPI speed is 6.40 GT/s | 588143-L21 |
| HP DL580 G7 Intel® Xeon® X7550 (2.0GHz/8-core/18MB/130W) FIO 2-processor Kit NOTE: QPI speed is 6.40 GT/s | 588145-L21 |
| HP DL580 G7 Intel® Xeon® L7555 (1.86GHz/8-core/24MB/95W) FIO 2-processor Kit NOTE: QPI speed is 5.86 GT/s | 588154-L21 |
| Six-Core Processors | |
| HP DL580 G7 Intel® Xeon® E7-4807 (1.86GHz/6-core/18MB/95W) FIO 2-processor Kit NOTE: QPI speed is 4.80 GT/s | 643077-L21 |
| HP DL580 G7 Intel® Xeon® E7540 (2.0GHz/6-core/18MB/105W) FIO 2-processor Kit NOTE: QPI speed is 6.40 GT/s | 588150-L21 |
| HP DL580 G7 Intel® Xeon® E7530 (1.86GHz/6-core/12MB/105W) FIO 2-processor Kit NOTE: QPI speed is 5.86 GT/s | 588152-L21 |
| HP DL580 G7 Intel® Xeon® X7542 (2.66GHz/6-core/18MB/130W) FIO 2-processor Kit NOTE: QPI speed is 6.40 GT/s | 588156-L21 |
| Quad-Core Processors | |
| HP DL580 G7 Intel® Xeon® E7520 (1.86GHz/4-core/18MB/95W) FIO Processor Kit NOTE: QPI speed is 4.80 GT/s NOTE: Intel® Xeon® Processor X7500 series processors are supported only in the HP ProLiant DL580 G7 Configure-to-order Server (588857-B21) and 7500 series pre- | 595245-L21 |



Configuration Information - Factory Integrated Models

configured models.

NOTE: Intel® Xeon® Processor E7-4800 series processors are supported only in the HP ProLiant DL580 G7 (E7) Configure-to-order Server (PN 643086-B21) and E7 series pre-configured models)

HP Memory

Registered DIMMs (RDIMMs)

HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit 500656-B21

NOTE: Only supported with the Intel® Xeon® Processor 7500 series processors

HP 4GB (1x4GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit 500658-B21

HP 4GB (1x4GB) Single Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit 604504-B21

HP 8GB (1x8GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit 500662-B21

HP 8GB (1x8GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit 604506-B21

HP 16GB (1x16GB) Quad Rank x4 PC3-8500 (DDR3-1066) Registered CAS-7 Memory Kit 500666-B21

HP 16GB (1x16GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 LP Memory Kit 627812-B21

HP 32GB (1x32GB) Quad Rank x4 PC3L-8500 (DDR3-1066) Registered CAS-7 LP Memory Kit 627814-B21

NOTE: PC3L DIMMs are only supported with the Intel® Xeon® Processor E7 series processors and require (E7) memory cartridge

NOTE: PC3L is a low-voltage memory.

Memory Expansion Options

HP DL580G7/DL980G7 (E7) Memory Cartridge 644172-B21

NOTE: Four memory cartridges come standard in the HP ProLiant DL580 G7 (E7) Configure-to-order Server (643086-B21), each kit contains one cartridge and a maximum of (8) are supported in the server. See Memory Performance Optimization in the Memory section for configuration guidelines.

HP DL580G7/DL980G7 Memory Cartridge 588141-B21

NOTE: Two memory boards come standard in the HP ProLiant DL580 G7 Configure-to-order Server (588857-B21) each kit contains one memory board and a maximum of (8) are supported in the server. See Memory Performance Optimization in the Memory section for configuration guidelines.

HP Power Supplies

NOTE: Prior to making a power supply selection it is highly recommended that the HP Power Advisor is run to determine the right size power supply for your server configuration. The HP Power Advisor is located at: www.hp.com/go/hppoweradvisor.

HP 1200W Common Slot Silver Hot Plug Power Supply Kit 500172-B21

HP 1200W Common Slot Platinum Hot Plug Power Supply Kit 578322-B21

NOTE: All power supplies in a server should match. Mixing Platinum and Silver Power Supplies is not supported.

NOTE: Option Kits contain optional power supply, an IEC power cable and PDU IEC cables.



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Configuration Information - Factory Integrated Models

Step 3: Choose Additional Factory Integratable Options

| | | |
|------------------------|--|------------|
| HP Storage Controllers | Optional Upgrades | |
| | HP 1GB Flash Backed Cache | 534562-B21 |
| HP Insight Software | HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Single Server FIO License | 582765-B21 |
| | HP Insight Control for Linux including 1yr 24x7 Support ML/DL Bundle 1 Server FIO License | TC203A |

Step 4: Choose Additional Options for Factory Integration

NOTE: For additional options, please refer to the "Core Options" and "Additional Options" section below.

SOLO NETWORK



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Core Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

| | | |
|--|--|------------|
| HP Unique Options | HP DL580 G7 PCI Express Kit | 588137-B21 |
| | NOTE: Adds four PCI-E 2.0 x8, one PCI-E 2.0 x4 and one PCI-E 1.1 x4. | |
| | HP DL580 G7 PCI-X Combo Express Kit | 588139-B21 |
| | NOTE: Adds two PCI-E 2.0 x16, one PCI-E 2.0 x4 and two PCI-X. | |
| HP DL580G7/DL980G7 (E7) Memory Cartridge | | 644172-B21 |
| | NOTE: Only supported on the HP HP ProLiant DL580 G7 (E7) Configure-to-order Server (643086-B21) and (E7) pre-configured models | |
| HP DL580G7/DL980G7 Memory Cartridge | | 588141-B21 |
| | NOTE: Only supported on the HP ProLiant DL580 G7 Configure-to-order Server (588857-B21) and Xeon Processor 7500 pre-configured models | |

HP Processors

Ten-Core Processors

NOTE: Ten-Core Processors available soon.

HP DL580 G7 Intel® Xeon® E7-4870 (2.40GHz/10-core/30MB/130W) Processor Kit 643067-B21

NOTE: QPI speed is 6.40 GT/s

HP DL580 G7 Intel® Xeon® E7-4860 (2.26GHz/10-core/24MB/130W) Processor Kit 643069-B21

NOTE: QPI speed is 6.40 GT/s

HP DL580 G7 Intel® Xeon® E7-4850 (2.00GHz/10-core/24MB/130W) Processor Kit 643071-B21

NOTE: QPI speed is 6.40 GT/s

HP DL580 G7 Intel® Xeon® E7-8867L (2.13GHz/10-core/30MB/105W) Processor Kit 643079-B21

NOTE: QPI speed is 6.40 GT/s

Eight-Core Processors

HP DL580 G7 Intel® Xeon® E7-8837 (2.67GHz/8-core/24MB/130W) Processor Kit 643081-B21

NOTE: QPI speed is 6.40 GT/s

HP DL580 G7 Intel® Xeon® E7-4830 (2.13GHz/8-core/24MB/105W) Processor Kit 643073-B21

NOTE: QPI speed is 6.40 GT/s

HP DL580 G7 Intel® Xeon® E7-4820 (2.0GHz/8-core/18MB/105W) Processor Kit 643075-B21

NOTE: QPI speed is 5.86 GT/s

HP DL580 G7 Intel® Xeon® X7560 (2.26GHz/8-core/24MB/130W) Processor Kit 588143-B21

NOTE: QPI speed is 6.40 GT/s

HP DL580 G7 Intel® Xeon® X7550 (2.0GHz/8-core/18MB/130W) Processor Kit 588145-B21

NOTE: QPI speed is 6.40 GT/s

HP DL580 G7 Intel® Xeon® L7555 (1.86GHz/8-core/24MB/95W) Processor Kit 588154-B21

NOTE: QPI speed is 5.86 GT/s

Six-Core Processors

HP DL580 G7 Intel® Xeon® E7-4807 (1.86GHz/6-core/18MB/95W) Processor Kit 643077-B21

NOTE: QPI speed is 4.80 GT/s

HP DL580 G7 Intel® Xeon® E7540 (2.0GHz/6-core/18MB/105W) Processor Kit 588150-B21

NOTE: QPI speed is 6.40 GT/s



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Core Options

HP DL580 G7 Intel® Xeon® E7530 (1.86GHz/6-core/12MB/105W) Processor Kit 588152-B21
NOTE: QPI speed is 5.86 GT/s

HP DL580 G7 Intel® Xeon® X7542 (2.66GHz/6-core/18MB/130W) Processor Kit 588156-B21
NOTE: QPI speed is 5.86 GT/s

Quad-Core Processors

HP DL580 G7 Intel® Xeon® E7520 (1.86GHz/4-core/18MB/95W) Processor Kit 595245-B21
NOTE: QPI speed is 4.80 GT/s

NOTE: Above processor kits contain one processor each.

NOTE: Intel® Xeon® Processor X7500 series processors only supported in the HP ProLiant DL580 G7 Configure-to-order Server (588857-B21) and 7500 series pre-configured models.

NOTE: Intel® Xeon® Processor E7-4800 series processors only supported in the HP ProLiant DL580 G7 (E7) Configure-to-order Server (PN 643086-B21) and E7 series pre-configured models)

HP Memory

Registered DIMMs (RDIMMs)

HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit 500656-B21

NOTE: Only supported with the Intel® Xeon® Processor 7500 series processors

HP 4GB (1x4GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit 500658-B21

HP 4GB (1x4GB) Single Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit 604504-B21

HP 8GB (1x8GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit 500662-B21

HP 8GB (1x8GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit 604506-B21

HP 16GB (1x16GB) Quad Rank x4 PC3-8500 (DDR3-1066) Registered CAS-7 Memory Kit 500666-B21

HP 16GB (1x16GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 LP Memory Kit 627812-B21

HP 32GB (1x32GB) Quad Rank x4 PC3L-8500 (DDR3-1066) Registered CAS-7 LP Memory Kit 627814-B21

NOTE: PC3L DIMMs are only supported with the Intel® Xeon® Processor E7 series processors and require (E7) memory cartridge.

NOTE: PC3L is a low-voltage memory.

Memory Expansion Options

HP DL580G7/DL980G7 (E7) Memory Cartridge 644172-B21

NOTE: Four memory cartridges come standard in the HP ProLiant DL580 G7 (E7) Configure-to-order Server (643086-B21), each kit contains one cartridge and a maximum of (8) are supported in the server. See Memory Performance Optimization in the Memory section for configuration guidelines.

HP DL580G7/DL980G7 Memory Cartridge 588141-B21

NOTE: Two memory boards come standard in the HP DL580R07 CTO Server (588857-B21) each kit contains one memory board and a maximum of (8) are supported in the server. See Memory Performance Optimization in the Memory section for configuration guidelines.



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Core Options

HP Optical Drives

NOTE: Optical drives are ejectable.

| | |
|---|------------|
| HP Slim 12.7mm SATA DVD-RW Optical Drive | 481043-B21 |
| HP Slim 12.7mm SATA DVD-ROM Optical Drive | 481041-B21 |

HP Hard Drives

NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives

| | |
|---|------------|
| HP 900GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive | 619291-B21 |
| HP 600GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive | 581286-B21 |
| HP 450GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive | 581284-B21 |
| HP 300GB 6G SAS 10K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive | 507127-B21 |
| HP 300GB 6G SAS 15K rpm SFF (2.5-inch) Hot Plug Enterprise 3 yr Warranty Hard Drive | 627117-B21 |
| HP 146GB 6G SAS 15K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive | 512547-B21 |
| HP 72GB 6G SAS 15K rpm SFF (2.5-inch) Dual Port Enterprise 3yr Warranty Hard Drive | 512545-B21 |

SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives

| | |
|---|------------|
| HP 1TB 6G SAS 7.2K rpm SFF (2.5-inch) Dual Port Midline 1yr Warranty Hard Drive | 605835-B21 |
| HP 500GB 6G SAS 7.2K rpm SFF (2.5-inch) Dual Port Midline 1yr Warranty Hard Drive | 507610-B21 |

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18004.www1.hp.com/products/quickspecs/12244_div/12244_div.html
(Worldwide)

SATA Hot Plug SFF (2.5-inch) Midline (MDL) Drives

| | |
|---|------------|
| HP 1TB 3G SATA 7.2K rpm SFF (2.5-inch) Hot Plug Midline 1yr Warranty Hard Drive | 625609-B21 |
| HP 500GB 3G SATA 7.2K rpm SFF (2.5-inch) Midline 1yr Warranty Hard Drive | 507750-B21 |

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/13121_div/13121_div.html
(Worldwide)

SATA Hot Plug 2.5" Enterprise Mainstream Solid State Drives

| | |
|--|------------|
| HP 400GB 3G SATA MLC SFF (2.5-inch) Enterprise Mainstream 3yr Warranty Solid State Drive | 636597-B21 |
|--|------------|



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Core Options

HP 200GB 3G SATA MLC SFF (2.5-inch) Enterprise Mainstream 3yr Warranty Solid State Drive 636595-B21

HP 100GB 3G SATA MLC SFF (2.5-inch) Enterprise Mainstream 3yr Warranty Solid State Drive 636593-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/13021_div/13021_div.html
(Worldwide)

NOTE: Cable is not included for Non-hot plug Drives. SSD cable option kit sku: 661778-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/13415_div/13415_div.html
(Worldwide)

6G SAS Hot Plug Enterprise Performance Solid State Drives

HP 400GB 6G SAS SLC SFF (2.5-inch) Enterprise Performance 3yr Warranty Solid State Drive 632494-B21

HP 200GB 6G SAS SLC SFF (2.5-inch) Enterprise Performance 3yr Warranty Solid State Drive 632492-B21

6G SAS Hot Plug Enterprise Mainstream Solid State Drives

HP 800GB 6G SAS MLC SFF (2.5-inch) Enterprise Mainstream 3yr Warranty Solid State Drive 632506-B21

HP 400GB 6G SAS MLC SFF (2.5-inch) Enterprise Mainstream 3yr Warranty Solid State Drive 632504-B21

HP 200GB 6G SAS MLC SFF (2.5-inch) Enterprise Mainstream 3yr Warranty Solid State Drive 632502-B21

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/14038_div/14038_div.html
(Worldwide)



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Core Options

HP Networking

Gigabit Ethernet Adapters

| | |
|--|------------|
| HP NC112T PCI Express Gigabit Server Adapter | 503746-B21 |
| HP NC360T PCI-E Dual Port Gigabit Server Adapter | 412648-B21 |
| HP NC364T PCI-E 4-port Gigabit Server Adapter | 435508-B21 |
| HP NC365T 4-port Ethernet Server Adapter | 593722-B21 |
| HP NC373F PCI-E Multifunction 1000SX Gigabit Svr Adapter | 394793-B21 |
| HP NC373T PCI-E Multifunction Gigabit Server Adapter | 394791-B21 |
| HP NC375T PCI Express Quad Port Gigabit Server Adapter | 538696-B21 |
| HP NC382T PCI Express Dual Port Multifunction Gigabit Server Adapter | 458492-B21 |

10 Gigabit Ethernet Adapters

NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

NOTE: Direct Attach Cable (DAC) for copper environments or fiber transceivers and cables for fiber-optic environments must be purchased separately.

| | |
|---|------------|
| HP NC522SFP Dual Port 10GbE Gigabit Server Adapter | 468332-B21 |
| HP NC524SFP Dual Port 10GbE Module | 489892-B21 |
| HP NC523SFP 10Gb 2-port Server Adapter | 593717-B21 |
| HP NC550SFP Dual Port 10GbE Server Adapter | 581201-B21 |
| HP NC552SFP 10Gb 2-port Ethernet Server Adapter | 614203-B21 |
| HP 10 GbE PCI-e G2 Dual Port Network Interface Card | 516937-B21 |

NOTE: Please see the QuickSpecs for Technical Specifications and additional information: www.hp.com/go/ProLiantNICs

HP InfiniBand

| | |
|---|------------|
| QLogic InfiniBand 4X QDR PCI-E G2 Dual Port HCA | 583211-B21 |
| HP InfiniBand 4X QDR ConnectX-2 PCIe G2 Dual Port HCA | 592520-B21 |
| HP InfiniBand 4X DDR ConnectX-2 PCIe G2 Dual Port HCA | 592521-B21 |
| HP InfiniBand 4X DDR PCI-E 0 Memory Dual Port HCA | 483513-B21 |

HP I/O Expansion Options

| | |
|-------------------------------------|------------|
| HP DL580 G7 PCI Express Kit | 588137-B21 |
| HP DL580 G7 PCI-X Combo Express Kit | 588139-B21 |

NOTE: Adds four PCI-E 2.0 x8, one PCI-E 2.0 x4 and one PCI-E 1.1 x4.

NOTE: Adds two PCI-E 2.0 x16, one PCI-E 2.0 x4 and two PCI-X

Suggested Slot placement:

1. Slot 3 PCIe2 x 16 (16,8,4,2,1)
2. Slot 6 PCIe2 x 16 (16,8,4,2,1)
3. Slot 9 PCIe2 x 16 (8,4,2,1)*
4. Slot 11 PCIe2 x 16 (8,4,2,1)*
5. Note - Slot 9 and 11 are physically a x16 slot but will operate electrically at x8.



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Core Options

HP Power Supplies

NOTE: Prior to making a power supply selection it is highly recommended that the HP Power Advisor is run to determine the right size power supply for your server configuration. The HP Power Advisor is located at: www.hp.com/go/hppoweradvisor.

HP 1200W Common Slot Silver Hot Plug Power Supply Kit

500172-B21

HP 1200W Common Slot Platinum Hot Plug Power Supply Kit

578322-B21

NOTE: All power supplies in a server should match. Mixing Platinum and Silver Power Supplies is not supported.

NOTE: Option Kits contain optional power supply, an IEC power cable and PDU IEC cables.

SOLO NETWORK



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Additional Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

| | | |
|----------------------------|--|------------|
| HP Insight Software | HP Insight Control | |
| | HP Insight Control including 1yr 24x7 Technical Support and Updates Electronic License | T9074BAE |
| | HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Electronic License | TC278AAE |
| | HP Insight Control including 1yr 24x7 Technical Support and Updates Single Server License | 452148-B22 |
| | HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Tracking License | TC275A |
| | NOTE: Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key. | |
| | NOTE: Electronic software is available in all countries except China and Japan. Customers in China and Japan should order the physical equivalent. | |
| | NOTE: Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service. | |
| | NOTE: Licenses ship without media. The HP Insight Control Media Kit can be ordered separately, or can be downloaded at: http://www.hp.com/go/insightupdates . | |
| | NOTE: For additional license options please see the Insight Control QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12631_div/12631_div.html | |
| | HP Insight Control for Linux | |
| | HP Insight Control for Linux w/1yr 24x7 Supp ML/DL/SL Bundle Electronic 1 Svr LTU | TC203AAE |
| | HP Insight Control for Linux including 1yr 24x7 Support Electronic License | TC213AAE |
| | HP Insight Control for Linux including 1yr 24x7 Support Single Server License | TC209A |
| | HP Insight Control for Linux Media Kit | TC208A |
| | NOTE: Licenses ship without media. The Media Kit for Insight Control for Linux can be ordered separately, or can be downloaded at: http://www.hp.com/go/ic-linux (click on Download button). | |
| | NOTE: Electronic licenses can be used to purchase multiple licenses with a single activation key, and are available in all countries except China and Japan. Customers in China and Japan should order the physical equivalent. | |
| | NOTE: Customer will receive a license entitlement certificate, which must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service. | |
| | NOTE: For additional License Kits, including electronic licensing options, please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/13019_div/13019_div.html | |
| | HP Integrated Lights-Out Advanced | |
| | HP iLO Advanced including 1yr 24x7 Technical Support and Updates Electronic License | TA850AAE |
| | HP iLO Advanced including 1yr 24x7 Technical Support and Updates Single Server License | 512485-B21 |



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Additional Options

| | |
|--|------------|
| HP Insight Software Media Kit | 436222-B21 |
| <p>NOTE: Insight Software DVD media without licenses. Contains HP Systems Insight Manager, HP Insight Control, HP Insight Dynamics, HP Insight Control for Microsoft System Center, and Virtual Connect Enterprise Manager software. Uses an integrated installer to perform quick and accurate software installation and updates.</p> | |
| <p>NOTE: This license allows 1 server to be deployed and managed via HP iLO Advanced. Customer will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service</p> | |
| <p>NOTE: Electronic software is available in all countries except China and Japan. Customers in China and Japan should order the physical equivalent.</p> | |
| <p>NOTE: For additional license kits, including electronic delivery options, please see the QuickSpecs at:</p> | |
| <p>http://h18000.www1.hp.com/products/quickspecs/12362_div/12362_div.html</p> | |
| <p>HP Insight Control server deployment</p> | |
| HP Insight Control Server Deployment including 1yr 24x7 Support Electronic License | T9082AAE |
| HP Insight Control Server Deployment including 1yr 24x7 Support Single Server License | 452151-B21 |
| <p>NOTE: Licenses ship without media. The Insight Control Media Kit can be ordered separately, or can be downloaded at: http://www.hp.com/go/insightupdates.</p> | |
| <p>NOTE: Electronic licenses can be used to purchase multiple licenses with a single activation key, and is available in all countries except China and Japan. Customers in China and Japan should order the physical equivalent.</p> | |
| <p>NOTE: Customer will receive a license entitlement certificate, which must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service.</p> | |
| <p>NOTE: For additional license kits please see the Insight Control QuickSpecs at: http://h18004.www1.hp.com/products/quickspecs/12631_div/12631_div.html</p> | |

High Performance Clusters

| | |
|---|------------|
| <p>HP Cluster Management Utility</p> | |
| HP Cluster Management Utility Flexible License | QL803A |
| <p>NOTE: This part number can be used to purchase one certificate for multiple licenses with a single activation key. Each license is for one node (server). Customer will receive a printed end user license agreement and license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online in order to obtain a license key.</p> | |
| HP Cluster Management Utility Media | 433257-B21 |
| <p>NOTE: Order a minimum of one license per cluster to purchase media including software and documentation, which will be delivered to the customer, and also licenses CMU management. No license key is delivered or required.</p> | |
| <p>NOTE: For additional license kits please see the QuickSpecs at: http://h18004.www1.hp.com/products/quickspecs/12612_div/12612_div.html</p> | |
| <p>HP HPC Linux Value Pack</p> | |



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Additional Options

| | |
|---|--------|
| HP High Performance Computing Linux Value Pack 1 Processor Flexible License | TC293B |
| <p>NOTE: This part number can be used to purchase one certificate for multiple licenses with a single activation key. Each license is for one socket (a.k.a. processor). Customer will receive a printed end user license agreement and license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online in order to obtain a license key.</p> | |
| HP High Performance Computing Linux Value Pack Media Kit | TC294A |
| <p>NOTE: This part number can be used to purchase media including software and documentation, which will be delivered to the customer.</p> <p>NOTE: For additional license kits please see the QuickSpecs at: http://h18004.www1.hp.com/products/quickspecs/13485_div/13485_div.html</p> | |

| | | |
|--|---|------------|
| HP I/O Accelerator Options | HP 160GB Single Level Cell PCIe ioDrive for ProLiant Servers | 600278-B21 |
| | <p>NOTE: A low-profile PCI bracket is included for use in low-profile slots.</p> | |
| | HP 320GB Multi Level Cell PCIe ioDrive for ProLiant Servers | 600279-B21 |
| | <p>NOTE: A low-profile PCI bracket is included for use in low-profile slots.</p> | |
| | HP 320GB Single Level Cell PCIe ioDrive Duo for ProLiant Servers | 600281-B21 |
| | HP 640GB Multi Level Cell PCIe ioDrive Duo for ProLiant Servers | 600282-B21 |
| | HP 1.28TB Multi Level Cell PCIe IO Accelerator | 641027-B21 |
| <p>NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/13587_div/13587_div.html (Worldwide)</p> | | |

| | | |
|---|---|------------|
| HP Graphics Options | HP DL580/DL585/DL980 G7 Power Cable Kit | 631660-B21 |
| <p>NOTE: The HP ProLiant DL580 G7 can support up to 4 (225W) or 3(300W) Graphic Cards and/or GPGPU Accelerator Options (x16 PCIE add-in cards in slots 11 and 9 will down-train electrically to x8 PCIE which may result in reduced performance.)</p> <p>NOTE: An option kit will be required per Graphic Card and/or GPGPU Accelerator Options.</p> <p>NOTE: Depending on the number of GPGPUs required, customers will need to purchase the following I/O expansion boards: DL580G7 PCI-X / PCI Express I/O Exp. Kit; PN: 588139-B21 (Adds two PCI-E 2.0 x16, one PCI-E 2.0 x4 and two PCI-X).</p> | | |



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Additional Options

| | |
|------------------------|---|
| HP Security | <p>HP Trusted Platform Module Option 488069-B21</p> <p>NOTE: The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys. Windows® BitLocker™ Drive Encryption (BitLocker) is a data protection feature available in Windows Server® 2008. BitLocker leverages the enhanced security capabilities of a Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help protect user data and to ensure that a server running Windows Server 2008 has not been tampered with while the system was offline. For more information about TPM, including a white paper, go to: www.hp.com/go/TPM.</p> <p>NOTE: ProLiant OS pre-installed units will come with the partition required for TPM deployment.</p> <p>NOTE: The TPM key is unique to every TPM deployed server and must be retained. Misplacing or losing the key could result in data loss.</p> |
| <hr/> | |
| HP Storage Controllers | <p>SAS Controllers</p> <p>Smart Array P212 Controller</p> <p>HP Smart Array P212/ZM 1-ports Int/1-ports Ext PCIe x8 SAS Controller 462828-B21</p> <p>HP Smart Array P212/256 1-ports Int/1-ports Ext PCIe x8 SAS Controller 462834-B21</p> <p>Smart Array P410 Controller</p> <p>HP Smart Array P410/256 2-ports Int PCIe x8 SAS Controller 462862-B21</p> <p>HP Smart Array P410/512 BBWC 2-ports Int PCIe x8 SAS Controller 462864-B21</p> <p>HP Smart Array P410/512 FBWC 2-ports Int PCIe x8 SAS Controller 578230-B21</p> <p>HP Smart Array P410/1G FBWC 2-ports Int PCIe x8 SAS Controller 572532-B21</p> <p>Smart Array P411 Controller</p> <p>HP Smart Array P411/256 2-ports Ext PCIe x8 SAS Controller 462830-B21</p> <p>HP Smart Array P411/512 BBWC 2-ports Ext PCIe x8 SAS Controller 462832-B21</p> <p>HP Smart Array P411/1G FBWC 2-ports Ext PCIe x8 SAS Controller 572531-B21</p> <p>HP Smart Array P411/512 FBWC 2-ports Ext PCIe x8 SAS Controller 578229-B21</p> <p>Smart Array P812 Controller</p> <p>HP Smart Array P812/1G FBWC 2-ports Int/4-ports Ext PCIe x8 SAS Controller 487204-B21</p> <p>Optional Upgrades</p> <p>HP 512MB P-Series Battery Backed Write Cache Upgrade 462967-B21</p> <p>NOTE: Supported on HP Smart Array P411 Controller only.</p> <p>HP 1GB Flash Backed Cache 534562-B21</p> <p>HP 512MB Flash Backed Write Cache 534916-B21</p> <p>HP 256MB P-series Cache Upgrade 462968-B21</p> <p>HP Smart Array Advanced Pack including 1yr 24x7 Technical Support and Updates Single Server License 516471-B21</p> <p>NOTE: This part number can be used to purchase a single license or to order multiple licenses with a single activation key. Customers will receive a license entitlement certificate via e-mail. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Include one year of 24x7 HP Software Technical Support Services.</p> <p>NOTE: Please see the QuickSpecs for Technical Specifications and additional</p> |



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Additional Options

information:

http://h18000.www1.hp.com/products/quickspecs/13203_div/13203_div.html
(Smart Array P212 Controller)

http://h18000.www1.hp.com/products/quickspecs/13201_div/13201_div.html
(Smart Array P410 Controller)

http://h18000.www1.hp.com/products/quickspecs/13202_div/13202_div.html
(Smart Array P411 Controller)

http://h18000.www1.hp.com/products/quickspecs/13558_div/13558_div.html
(Smart Array P812 Controller)

http://h18000.www1.hp.com/products/quickspecs/13200_div/13200_div.html
(Smart Array Advanced Pack)

SAS HBA

HP Modular Smart Array SC08e 2-ports Ext PCIe x8 SAS Host Bus Adapter 614988-B21

NOTE: This is a 2 x4 External Port HBA

NOTE: This is only approved for the HP P2000 G3 SAS Modular Smart Array.

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18004.www1.hp.com/products/quickspecs/13651_div/13651_div.html
(SC08e 6Gb HBA)

SCSI HBA

HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter 412911-B21

NOTE: Recommended HBA for SCSI tape drive connect.

NOTE: Please see the following QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/12566_div/12566_div.html
(SC11Xe HBA)

| | | |
|----------------|-----------------------------------|--------|
| HP Power Cords | HP 1.83m 10A C13 CZ Power Cord | AF565A |
| | HP 1.83m 10A C13 DK Power Cord | AF566A |
| | HP 1.83m 10A C13 EU Power Cord | AF568A |
| | HP 1.83m 10A C13 UK Power Cord | AF570A |
| | HP 1.83m 10A C13 IT/CL Power Cord | AF571A |
| | HP 2.5m 10A C13 ZA Power Cord | AF567A |



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Additional Options

HP Tape Backup

NOTE: For the complete range of tape drives, autoloaders, libraries and media see: <http://www.hp.com/go/tape>. For hardware and software compatibility of HP tape backup products see: <http://www.hp.com/storage/SPOCK>.

HP DAT 320 USB in 1U Rack-mount Kit AP835B

HP 1/8 G2 LTO-4 Ultrium 1760 SAS Tape Autoloader AK377A

NOTE: Requires HP 1U Tape Autoloader Rack Kit (AH166A) for rack installation. Connection using HP P212 SAS Smart Array Controller (462828-B21) recommended.

HP DAT 320 SAS Internal Tape Drive AJ830A

NOTE: For installation into 1U SAS rack kit (AE459B) or 3U SAS rack kit (AG576B). No peripheral bay available for installation into the server. Connection using HP P212 Smart Array Controller SAS (462828-B21) recommended.

HP Ultrium 920 SAS Internal Tape Drive EH847A

NOTE: For installation into 1U SAS rack kit (AE459B) or 3U SAS rack kit (AG576B). No peripheral bay available for installation into the server. Connection using HP P212 Smart Array Controller SAS (462828-B21) recommended.

HP LTO-4 Ultrium 1840 SAS External WW Drive EH861A

HP LTO-5 Ultrium 3280 SAS Internal Tape Drive EH899A

NOTE: For installation into 3U SAS rack kit (AG576B). No peripheral bay available for installation into the server. Connection using HP P212 Smart Array Controller SAS (462828-B21) recommended.

HP 1/8 G2 LTO-5 Ultrium 3000 SAS Tape Autoloader BL536A

NOTE: Requires HP 1U Tape Autoloader Rack Kit (AH166A) for rack installation. Connection using HP P212 Smart Array Controller SAS (462828-B21) recommended.

HP MSL2024 1 LTO-4 Ultrium 1760 SAS Tape Library AK378A

HP MSL2024 1 LTO-5 Ultrium 3000 SAS Tape Library BL537A

NOTE: Connection using HP P212 Smart Array Controller SAS (462828-B21) recommended.

HP MSL4048 2 LTO-4 Ultrium 1760 SAS Tape Library AK380A

HP MSL4048 2 LTO-5 Ultrium 3000 SAS Tape Library BL538A

NOTE: Connection using HP P212 Smart Array Controller SAS (462828-B21) recommended.

HP MSL8096 2 LTO-4 Ultrium 1760 SAS Tape Library AK382A

HP MSL8096 2 LTO-5 Ultrium 3000 SAS Tape Library BL539A

NOTE: Connection using HP P212 Smart Array Controller SAS (462828-B21) recommended.



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Additional Options

HP Disk Backup

NOTE: For the complete range of D2D Backup Systems see: <http://www.hp.com/go/d2d>. For the complete range of RDX drives and media see: <http://www.hp.com/go/rdx>. For hardware and software compatibility of HP disk backup products see: <http://www.hp.com/storage/SPOCK>.

HP D2D Backup Systems with Backup Data Deduplication

HP D2D2504i Backup System EJ002B

NOTE: 3.0TB of useable network disk backup capacity. Network connected appliance with connectivity using the iSCSI protocol. If the server requires a hardware iSCSI initiator, the QLogic QLA4050 Host Bus Adapter is recommended.

HP D2D4112 Backup System EH993B

NOTE: 9.0TB (expandable to 18.0TB) of useable network disk backup capacity. Fibre Channel SAN connected appliance. Direct server attach is not supported, requires connection via SAN fabric.

HP RDX Removable Disk Backup Systems USB

HP StorageWorks RDX500 Internal Removable Disk Backup System AJ934A

NOTE: For installation into 1U USB Rack-Mount Kit (A8007A). No peripheral bay available for drive installation into the server. 500GB of disk capacity per data cartridge.

HP StorageWorks RDX1000 Internal Removable Disk Backup System BV847A

NOTE: For installation into 1U USB Rack-Mount Kit (A8007A). No peripheral bay available for drive installation into the server. 1TB of disk capacity per data cartridge.

HP Storage Options

Storage Fibre Channel HBA

NOTE: The following is a list of all Fibre Channel Host Bus Adapters for Windows and Linux. For detailed compatibility information please see:

<http://h18006.www1.hp.com/storage/saninfrastructure/hba.html>

Brocade Fibre Channel HBAs

HP 81B PCIe 8Gb Fibre Channel Single Port Host Bus Adapter AP769A

HP 82B PCIe 8Gb Fibre Channel Dual Port Host Bus Adapter AP770A

HP 41B PCIe 4Gb Fibre Channel Single Port Host Bus Adapter AP767A

HP 42B PCIe 4Gb Fibre Channel Dual Port Host Bus Adapter AP768A

Emulex Fibre Channel HBAs

HP 81E 8Gb Single Port PCI-e Fibre Channel Host Bus Adapter AJ762A

HP 82E 8Gb Dual Port PCI-e Fibre Channel Host Bus Adapter AJ763A

HP FC2142SR 4Gb PCIe Host Bus Adapter A8002A

HP FC2242SR 4Gb PCIe DC Host Bus Adapter A8003A

QLogic Fibre Channel HBAs

HP 81Q PCI-e Fibre Channel Host Bus Adapter AK344A

HP 82Q 8Gb Dual Port PCI-e Fibre Channel Host Bus Adapter AJ764A

HP FC1142SR 4Gb PCIe Host Bus Adapter AE311A

HP FC1242SR 4Gb PCIe DC Host Bus Adapter AE312A

Converged Network Adapter

HP CN1100E Dual Port Converged Network Adapter BK835A

HP CN1000Q Dual Port Converged Network Adapter BS668A



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Additional Options

| | |
|--|--------|
| HP CN1000E Dual Port Converged Network Adapter | AW520A |
|--|--------|

| | | |
|--------------------------------|--|------------|
| HP Disk Storage Systems | MSA SAN Storage Arrays | |
| | HP MSA70 Array | 418800-B21 |
| | NOTE: Supports 25 SFF drives, and SAS 3 Gb/s and SATA 1.5 Gb/s. | |
| | NOTE: Please see the QuickSpecs for additional options and configuration information at: | |
| | http://h18000.www1.hp.com/products/quickspecs/12652_div/12652_div.html | |
| | Disk Enclosures | |
| | HP D2600 Disk Enclosure | AJ940A |
| | HP D2700 Disk Enclosure | AJ941A |
| | NOTE: Please see the QuickSpecs for additional options and configuration information at: | |
| | http://h18000.www1.hp.com/products/quickspecs/13404_div/13404_div.html (Worldwide) | |

| | | |
|---|--|--------|
| HP Uninterruptible Power Systems | HP Rack-mountable UPS | |
| | HP R1500 G3 Uninterruptible Power Supply (UPS) | |
| | HP R1.5kVA G3 1U NA Uninterruptible Power System | AF469A |
| | HP R1.5kVA G3 1U JP/TW Uninterruptible Power System | AF470A |
| | HP R1.5kVA G3 1U INTL Uninterruptible Power System | AF471A |
| | NOTE: Please see the QuickSpecs for additional information: | |
| | http://h18000.www1.hp.com/products/quickspecs/14059_div/14059_div.html (Worldwide) | |
| | HP R/T3000 G2 Uninterruptible Power System (UPS) | |
| | HP R/T3000 G2 2U L530 Low Voltage NA/JP Uninterruptible Power System | AF466A |
| | HP R/T3000 G2 2U L620 High Voltage NA/JP Uninterruptible Power System | AF467A |
| | HP R/T3000 G2 2U Detachable Cord High Voltage INTL Uninterruptible Power System | AF468A |
| | NOTE: Please see the QuickSpecs for additional information: | |
| | http://h18000.www1.hp.com/products/quickspecs/14058_div/14058_div.html (Worldwide) | |
| | HP Rack-Mountable R5500 UPS | |
| | HP R5500 6000VA INTL 3U Rackmount Uninterruptible Power System | AF416A |
| | HP R5500 5000kVA NA/JP 3U Rackmount Uninterruptible Power System | AF426A |
| | NOTE: Please see the QuickSpecs for additional information: | |
| | http://h18000.www1.hp.com/products/quickspecs/11871_div/11871_div.html (Worldwide) | |
| | R5000 Uninterruptible Power System (UPS) | |
| | HP R5KVA 3U IEC309-32A High Voltage INTL Uninterruptible Power System | AF461A |
| | HP R5KVA 3U L630 High Voltage NA/JP Uninterruptible Power System | AF460A |



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Additional Options

NOTE: Please see the QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/14109_div/14109_div.html
(Worldwide)

R7000 Uninterruptible Power System (UPS)

HP R7KVA 4U 50A High Voltage NA/JP Uninterruptible Power System AF462A

HP R7KVA 4U IEC-32A High Voltage INTL Uninterruptible Power System AF463A

NOTE: Please see the QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/14110_div/14110_div.html
(Worldwide)

NOTE: For additional information on HP Uninterruptible Power Systems please go to:

www.hp.com/servers/rackups.

NOTE: For additional information on sizing your server, please reference:

<http://www.upssizer.com>.

NOTE: Please see the UPS and PDU cable matrix's on the HP Power Protection and Management page. Under Power Cords, click on the "HP Power Cord Matrix" link. That link will list cable descriptions, requirements, and specifications for UPS and PDU units. Please see the following link: www.hp.com/products/powercords.

HP Power Distribution Units

HP Monitored Power Distribution Unit: Half Rack Version

HP 4.9kVA 24A Single Input Single Phase NA/JP Monitored Power Distribution Unit AF914A

HP 7.3kVA 32A Single Input Single Phase INTL Monitored Power Distribution Unit AF915A

HP Monitored Power Distribution Unit: Full Rack Version

HP 8.6kVA 24A Single Input Three Phase NA/JP Monitored Power Distribution Unit AF504A

HP 8.3kVA 40A Single Input Single Phase NA/JP Monitored Power Distribution Unit AF506A

HP 11kVA 16A Single Input Three Phase INTL Monitored Power Distribution Unit AF508A

HP 7.3kVA 32A Single Input Single Phase INTL Monitored Power Distribution Unit AF510A

NOTE: Please see the following QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/12118_div/12118_div.html
(Worldwide)

Modular Power Distribution Units 1U/0U (Up to 32 outlets)

NOTE: 1U/0U mounting brackets shipped with the unit (optimized for 10000 and 9000 series racks).

HP 4.9kVA 24A High Voltage NA/JP Modular Power Distribution Unit 252663-D72

HP 8.3kVA 40A High Voltage NA/JP Modular Power Distribution Unit 252663-D73

HP 7.3kVA 32A High Voltage INTL Modular Power Distribution Unit 252663-B31

HP 3.6kVA 16A High Voltage INTL Modular Power Distribution Unit 252663-B24

NOTE: This PDU has a detachable input power cord and allows for adaptability to country specific power requirements.

NOTE: Please see the following QuickSpecs for additional options including shorter jumper cables and country specific power cords:

http://h18000.www1.hp.com/products/quickspecs/11041_div/11041_div.html
(Worldwide)

NOTE: For additional information on HP Power Distribution Units including accessories please go to: www.hp.com/go/pdu.



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Additional Options

NOTE: Please see the UPS and PDU cable matrix's on the HP Power Protection and Management page. Under Power Cords, click on the "HP Power Cord Matrix" link. That link will list cable descriptions, requirements, and specifications for UPS and PDU units. Please see the following link: www.hp.com/products/powercords.

| | | |
|---|---|--------|
| HP Intelligent Power Distribution Units (iPDU) | iPDU Core Units | |
| | HP 4.9kVA 24A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit | AF520A |
| | HP 8.3kVA 40A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit | AF521A |
| | HP 8.6kVA 24A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit | AF522A |
| | HP 14.4kVA 40A Three Phase NA/JP Intelligent Modular Power Distribution Unit | AF533A |
| | HP 17.3kVA 48A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit | AF523A |
| | HP 7.3kVA 32A Single Phase INTL Core Intelligent Modular Power Distribution Unit | AF525A |
| | HP 11kVA 16A Three Phase INTL Core Intelligent Modular Power Distribution Unit | AF526A |
| | HP 22kVA 32A Three Phase INTL Core Intelligent Modular Power Distribution Unit | AF527A |
| | HP 11.4kVA 16A 415V Three Phase L22-20 NA/JP Core Intelligent Power Distribution Unit | AF900A |
| | HP 17.3kVA 24A 415V Three Phase L22-30 NA/JP Core Intelligent Power Distribution Unit | AF902A |
| | HP 17.3kVA 24A 415V Three Phase IEC309 NA/JP Core Intelligent Power Distribution Unit | AF901A |

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/13650_div/13650_div.html
(Worldwide)

| | | |
|-----------------------|---|--------|
| HP Rack Series | HP Rack 10000 G2 Series (Carbon/Graphite Metallic) | |
| | HP 10642 G2 Pallet Universal Rack | AF001A |
| | HP 10642 G2 Shock Universal Rack | AF002A |
| | HP 10642 G2 1200mm deep Shock Rack | AF092A |
| | HP 10647 G2 1200mm deep Shock Rack | AF094A |

NOTE: It is mandatory to use a shock pallet when shipping racks with equipment installed.

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/12402_div/12402_div.html
(Worldwide)

NOTE: For additional information regarding Rack Cabinets, please see the following URL: <http://www.hp.com/go/rackandpower>.

NOTE: The increasing power of new high-performance processor technology requires increased cooling efficiency for rack-mounted servers. The 10000 G2 Series Racks provide enhanced airflow for maximum cooling, allowing these racks to be fully loaded with servers using the latest processors.

CAUTION: If a third-party rack is used, observe the following additional requirements to ensure adequate airflow and to prevent damage to the equipment: Front and rear doors: If your 42U server rack includes closing front and rear doors, you must allow



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Additional Options

830 square inches (5,350 sq cm) of hole evenly distributed from top to bottom to permit adequate airflow (equivalent to the required 64 percent open area for ventilation). Side: The clearance between the installed rack component and the side panels of the rack must be a minimum of 2.75 inches (7 cm).

CAUTION: Always use blanking panels to fill all remaining empty front panel U-spaces in the rack. This arrangement ensures proper airflow. Using a rack without blanking panels results in improper cooling that can lead to thermal damage.

NOTE: Quick deploy rail system provides tool-free support for racks with square or round mounting holes (including Compaq/HP 7000, 9000, 10000 G2 and HP series), with an adjustment range of 24" - 36". The ambidextrous cable management arm can be mounted on either the left or right side for improved cable management.

HP Rack Options

HP Server Console Switches

HP Server Console 0x2x8 Port Analog Switch AF616A

HP Server Console 0x2x16 Port Analog Switch AF617A

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/11834_div/11834_div.html
(Worldwide)

HP Server Console Switch G2 with Virtual Media & CAC

HP 0x2x16 KVM Server Console Switch G2 with Virtual Media CAC Software AF618A

HP 0x2x32 KVM Server Console Switch G2 with Virtual Media CAC Software AF619A

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/13475_div/13475_div.html
(Worldwide)

HP IP Console Switch G2 with Virtual Media & CAC

HP 1x1Ex8 KVM IP Console Switch G2 with Virtual Media CAC Software AF620A

HP 2x1Ex16 KVM IP Console Switch G2 with Virtual Media CAC Software AF621A

HP 4x1Ex32 KVM IP Console Switch G2 with Virtual Media CAC Software AF622A

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:

http://h18000.www1.hp.com/products/quickspecs/13474_div/13474_div.html
(Worldwide)



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Additional Options

| | | |
|-----------------------|---|------------|
| HP USB and SD Options | HP USB 04 Standard Keyboard | DT528A#ABA |
| | HP 4GB Secure Digital High Capacity Flash Media Kit NOTE: Blank SD media device is supported for use with VMware and Citrix. SD media must be installed in the internal slot of the ProLiant server. Learn more at: http://www.hp.com/go/proliantvirtualization . | 580387-B21 |
| | HP 2GB USB Flash Media Drive Key Kit NOTE: HP qualified blank USB key for use with HP ProLiant servers that support the VMware virtualization environment and other HP value-add software like SmartStart. HP recommends this industry standard USB flash device for use with VMware ESXi. USB device must be installed in the internal slot of the ProLiant server for use with VMware ESXi. Refer to HP VMware Getting Started Guide for installation instructions. | 608447-B21 |

| | | |
|--|--|--------|
| HP Care Pack Services | Hardware Services On-site Service | |
| | HP 3 year 4 hour 13x5 ProLiant DL58x Hardware Support | U4607E |
| | HP 3 year 4 hour 24x7 ProLiant D58x Hardware Support | U4608E |
| | 6-Hour Call to Repair, On-site Service 7-Day x 24-Hour Coverage, 3 Years (U.S. Part Number) | |
| | HP 3 year 6 hour 24x7 Call to Repair ProLiant DL58x Hardware Support | U4609E |
| | Installation & Start-up Services | |
| | HP Install ProLiant DL58x Service | U4617E |
| | HP Startup ProLiant DL58x Service | U4618E |
| | HP Installation and Startup for Insight Control Server Deployment - previously Rapid Deployment Pack | U5683E |
| | Support Plus 24 | |
| HP 3 year Support Plus 24 Microsoft ProLiant DL58x Service | U4620E | |
| HP 3 year Support Plus 24 SuSE ProLiant DL58x Service | U6316E | |
| | NOTE: For more information, customer/resellers can contact: http://www.hp.com/services/carepack | |



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Memory

NOTE: Memory configurations listed do not apply to "Factory Integrated Models".

HP ProLiant DL580 G7

Memory Subsystem Architecture

Intel® Xeon® processor E7 and 7500 series memory architecture is designed to take advantage of multiple stages of memory interleaving to reduce latency and increase bandwidth.

Each processor contains two Memory Controllers as shown in the Processor/Memory interconnect figure below. Each Memory controller has two Scalable Memory Interface (SMI) buses operating in lockstep where each SMI bus connects to a memory buffer. The purpose of the buffer is to convert SMI to DDR3. Each buffer has two DDR3 channels and can support up to four DIMMs for a total of eight DIMMs per cartridge.

- Memory speed is not affected by number of DIMMs or ranks. All DIMMs will run at the highest possible speed for a given processor.
- DDR3 memory speed is a function of the processors QPI bus speed such that
 - Processors with a QPI speed of 6.4GT will run memory at 1066MHz
 - Processors with a QPI speed of 5.6GT will run memory at 978MHz
 - Processors with a QPI speed of 4.8GT will run memory at 800 MHz

DIMM Installation guidelines

Each memory cartridge can support up to 8 DIMMs, for a system total of 64 DIMMs. When installing DIMM modules in the Memory Cartridge observe the following minimum guidelines:

- UDIMMs are not supported
- Minimum allowable configuration is two DIMMs per cartridge.
- DIMMs must be installed in pairs with identical characteristics. For configuration simplicity HP recommends using identical part numbered DIMMs throughout when possible.
- DIMM pairs **MUST** be populated in sequence by letter designation. Install DIMM pair 1A, 8A first followed by DIMM pair 3B, 6B then DIMM pair 2C, 7C and DIMM pair 4D, 5D last.
- Maximum performance is achieved by balancing DIMM pairs by letter groupings across all memory cartridges. Such that the 1A, 8A pair is install in all memory cartridges first (see diagram below) followed by the B pair, C pair and D pair.
- AMP modes Online Sparing and Memory Mirroring have further requirements beyond these listed here. Please refer to the user guide for additional memory configuration requirements.

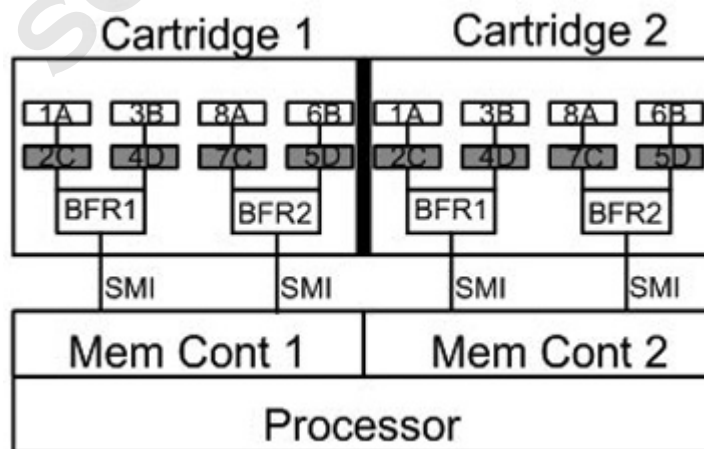


Figure 1 Processor/Memory interconnect

Illustration of how the processor, cartridges and DIMMs are electrically connected.



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Memory

Memory Cartridge population guidelines

This server contains 8 memory cartridge slots in the processor memory drawer. Observe the following guidelines:

- Populate memory cartridge slots for a processor only if the processor is installed where:
 - Processor 1 connects to cartridge slots 1 and 2.
 - Processor 2 connects to cartridge slots 3 and 4.
 - Processor 3 connects to cartridge slots 5 and 6.
 - Processor 4 connects to cartridge slots 7 and 8.
- Minimum recommended cartridge population is one cartridge per processor. For best performance two cartridges per processor are recommended.
- Processors installed without corresponding memory cartridges will incur high memory access latencies and is not recommended.
- To maximize performance in multi-processor configurations distribute the total memory capacity evenly between all processors.

Hemisphere mode

The architecture incorporates hemisphere mode, a high performance interleaving technology. Hemisphere mode allows interleaving between the two processor memory controllers internal to each processor.

Hemisphere mode is enabled when all processors in a system have the memory behind both memory controllers populated identically.

- To enable each processor to enter hemisphere mode it must have both cartridges installed, populated with equal memory capacities and follow the DIMM installation guidelines.

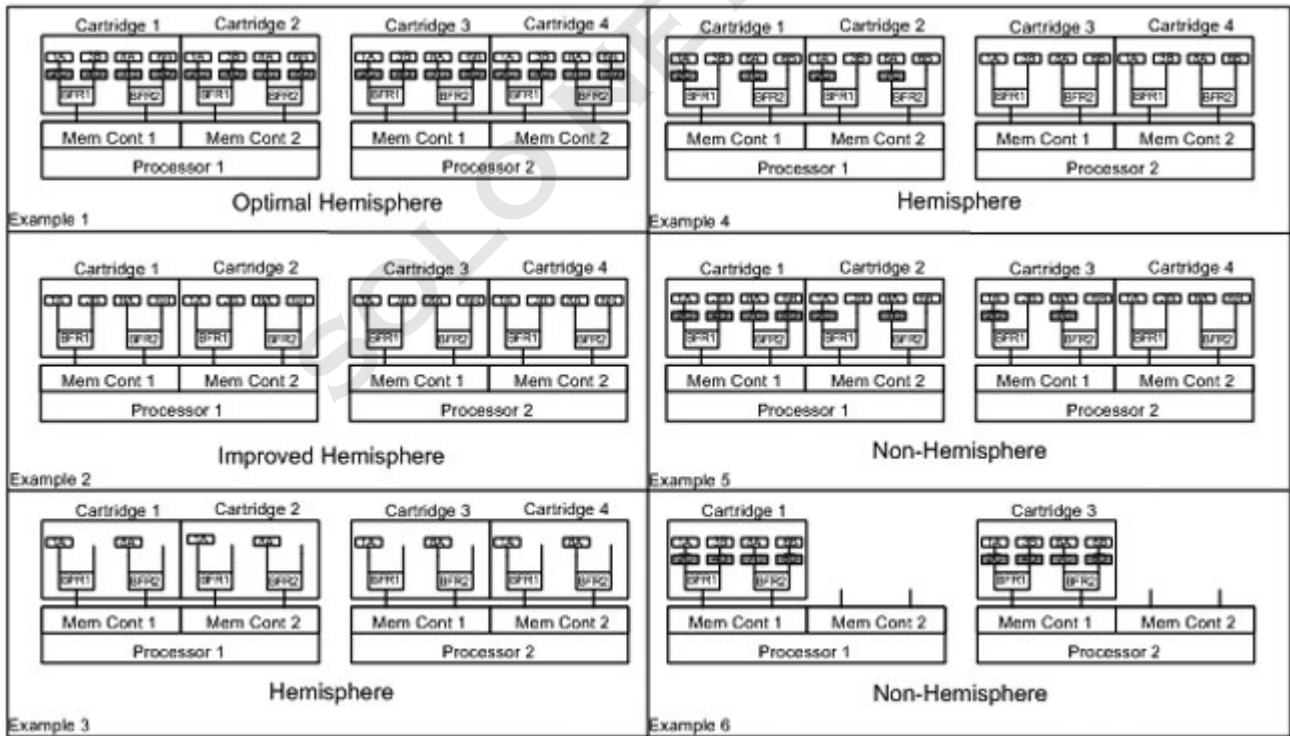


Figure 2 Hemisphere Population Diagram
Examples of Hemisphere vs Non-Hemisphere populations.

Memory Performance Optimization



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Memory

The DL580 G7 supports 64 DIMMs across four multi-core processors. While there are many DIMM population configurations that can support any desired total memory size, optimal performance can only be achieved when DIMMs are populated to take advantage of the architecture. Reference the Figure: Hemisphere Population Diagram to achieve the best performance for a given memory/processor configuration.

- The largest contributor to maximum memory bandwidth performance is to utilize both memory controllers inside the processor. This is achieved by populating both memory cartridges for each installed processor.
- The second largest contributor to performance is to populate each DDR3 channel in each memory cartridge. To achieve this, the minimum DIMM count per cartridge is four. Maximum bandwidth is reached by fully populating all memory cartridges with the maximum number of eight DIMMs per cartridge.
- Best performance is obtained when all installed processors are enabled for Hemisphere mode. HP recommends two memory boards per processor- each one with at least 4 DIMMs- for improved memory bandwidth
- Hemisphere mode is optimum when four or eight DIMMs are installed per cartridge. Hemisphere mode can be reached with two or six DIMMs per cartridge (2 cartridges per processor) but it is not optimal configuration for Hemisphere mode.
- Plan your memory configurations using Identical DIMMs to reach your memory size target taking into account that 32 and 64 DIMM count configurations result in the highest performance. For a 4 processor example:
 - If initial memory target is 64GB then populate a 4 processor system with eight cartridges of 4 - 2GB DIMMs each for a total of 32 DIMMs. Your maximum expansion target is 128GB with 64 2GB DIMMs.
 - For 4GB DIMMs your initial memory target is 128GB using 32 DIMMs. Your maximum expansion target is 256GB with 64 DIMMs.
 - For 8GB DIMMs your initial memory target is 256GB using 32 DIMMs. Your maximum expansion target is 512GB with 64 DIMMs.
 - Maximum system memory capability is reached with an initial memory target of 512GB with 32 - 16GBDIMMs and 2TB with 64 32GB DIMMs.
- The more ranks per DIMM the higher the performance such that Quad rank DIMMs perform better than dual rank DIMMs.

NOTE: Memory configurations listed do not apply to "Factory Integrated Models". Only registered (RDIMM) speeds of 1066 or 1333 running at 1066 are supported and must be installed in pairs. UDIMMs are not supported.

| HP Memory | Registered DIMMs (RDIMMs) | |
|-----------|--|------------|
| | HP 2GB (1x2GB) Dual Rank x8 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit | 500656-B21 |
| | NOTE: Only supported with the Intel® Xeon® Processor 7500 series processors | |
| | HP 4GB (1x4GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit | 500658-B21 |
| | HP 4GB (1x4GB) Single Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit | 604504-B21 |
| | HP 8GB (1x8GB) Dual Rank x4 PC3-10600 (DDR3-1333) Registered CAS-9 Memory Kit | 500662-B21 |
| | HP 8GB (1x8GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 Low Power Memory Kit | 604506-B21 |
| | HP 16GB (1x16GB) Quad Rank x4 PC3-8500 (DDR3-1066) Registered CAS-7 Memory Kit | 500666-B21 |
| | HP 16GB (1x16GB) Dual Rank x4 PC3L-10600 (DDR3-1333) Registered CAS-9 LP Memory Kit | 627812-B21 |
| | HP 32GB (1x32GB) Quad Rank x4 PC3L-8500 (DDR3-1066) Registered CAS-7 LP Memory Kit | 627814-B21 |
| | NOTE: PC3L DIMMs are only supported with the Intel® Xeon® Processor E7 series processors and require (E7) memory cartridge. | |
| | NOTE: PC3L is a low-voltage memory. | |



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Memory

Memory Expansion Option(s)

HP DL580G7/DL980G7 (E7) Memory Cartridge

644172-B21

HP DL580G7/DL980G7 Memory Cartridge

588141-B21

SOLO NETWORK



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Storage



1-8 SFF SAS Internal Drive cage

Drive Support

| | Quantity Supported | Position Supported | Controller |
|-----------------------------------|--------------------|--------------------|-----------------|
| Optical Drives | | | |
| Slimline DVD-ROM drive | Up to 1 | 1 | Integrated SATA |
| HP Slim SATA DVD RW Optical Drive | Up to 1 | 1 | Integrated SATA |

Hard Drives

NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components.

NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives

| | Quantity Supported | Position Supported | Controller |
|------------------|--------------------|--------------------|--|
| 900GB 6G SAS 10K | Up to 8 | 1-8 | HP Smart Array P212/Zero Memory Controller |
| 600GB 6G SAS 10K | | | HP Smart Array P212/256 MB Controller |
| 450GB 6G SAS 10K | | | HP Smart Array P410/256 MB Controller |
| 300GB 6G SAS 10K | | | HP Smart Array P410/512 MB BBWC Controller |
| 300GB 6G SAS 15K | | | HP Smart Array P410/512 MB FBWC Controller |
| 146GB 6G SAS 15K | | | HP Smart Array P410/1G FBWC Controller |
| 72GB 6G SAS 15K | | | HP Smart Array P411/256MB Controller |
| | | | HP Smart Array P411/512MB with BBWC Controller |
| | | | HP Smart Array P411/512MB Flash Backed Write Cache |
| | | | HP Smart Array P411/1G Flash Backed Write Cache |
| | | | HP Smart Array P812/1G Flash Backed Cache Controller |

SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives

| | Quantity Supported | Position Supported | Controller |
|-------------------|--------------------|--------------------|--|
| 1TB 6G SAS 7.2K | Up to 8 | 1-8 | HP Smart Array P212/Zero Memory Controller |
| 500GB 6G SAS 7.2K | | | HP Smart Array P212/256 MB Controller |
| | | | HP Smart Array P410/256 MB Controller |



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Storage

HP Smart Array P410/512 MB BBWC Controller
 HP Smart Array P410/512 MB FBWC Controller
 HP Smart Array P410/1G FBWC Controller
 HP Smart Array P411/256MB Controller
 HP Smart Array P411/512MB with BBWC Controller
 HP Smart Array P411/512MB Flash Backed Write Cache
 HP Smart Array P411/1G Flash Backed Write Cache
 HP Smart Array P812/1G Flash Backed Cache Controller

SATA Hot Plug SFF (2.5-inch) Midline (MDL) Drives

| | Quantity Supported | Position Supported | Controller |
|--------------------|--------------------|--------------------|--|
| 1TB 3G SATA 7.2K | Up to 8 | 1-8 | HP Smart Array P212/Zero Memory Controller |
| 500GB 3G SATA 7.2K | | | HP Smart Array P212/256 MB Controller |
| | | | HP Smart Array P410/256 MB Controller |
| | | | HP Smart Array P410/512 MB BBWC Controller |
| | | | HP Smart Array P410/512 MB FBWC Controller |
| | | | HP Smart Array P410/1G FBWC Controller |
| | | | HP Smart Array P411/256MB Controller |
| | | | HP Smart Array P411/512MB with BBWC Controller |
| | | | HP Smart Array P411/512MB Flash Backed Write Cache |
| | | | HP Smart Array P411/1G Flash Backed Write Cache |
| | | | HP Smart Array P812/1G Flash Backed Cache Controller |

SATA Hot Plug 2.5" Enterprise Mainstream Solid State Drives

| | Quantity Supported | Position Supported | Controller |
|---------------------|--------------------|--------------------|--|
| 400GB 3.0G SATA SSD | Up to 8 | 1-8 | HP Smart Array P212/Zero Memory Controller |
| 200GB 3.0G SATA SSD | | | HP Smart Array P212/256 MB Controller |
| 120GB 3.0G SATA SSD | | | HP Smart Array P410/256 MB Controller |
| 100GB 3.0G SATA SSD | | | HP Smart Array P410/512 MB BBWC Controller |
| 60GB 3.0G SATA SSD | | | HP Smart Array P410/512 MB FBWC Controller |
| | | | HP Smart Array P410/1G FBWC Controller |
| | | | HP Smart Array P411/256MB Controller |
| | | | HP Smart Array P411/512MB with BBWC Controller |
| | | | HP Smart Array P411/512MB Flash Backed Write Cache |
| | | | HP Smart Array P411/1G Flash Backed Write Cache |
| | | | HP Smart Array P812/1G Flash Backed Cache Controller |

6G SAS Hot Plug Enterprise Mainstream Solid State Drives

| | Quantity Supported | Position Supported | Controller |
|----------------------|--------------------|--------------------|--|
| 800GB 6G SAS MLC SFF | Up to 8 | 1-8 | HP Smart Array P212/Zero Memory Controller |
| 400GB 6G SAS MLC SFF | | | HP Smart Array P212/256 MB Controller |
| | | | HP Smart Array P410/256 MB Controller |
| | | | HP Smart Array P410/512 MB BBWC Controller |
| | | | HP Smart Array P410/512 MB FBWC Controller |



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Storage

HP Smart Array P410/1G FBWC Controller
 HP Smart Array P411/256MB Controller
 HP Smart Array P411/512MB with BBWC Controller
 HP Smart Array P411/512MB Flash Backed Write Cache
 HP Smart Array P411/1G Flash Backed Write Cache
 HP Smart Array P812/1G Flash Backed Cache Controller

6G SAS Hot Plug Enterprise Performance Solid State Drives

| | Quantity Supported | Position Supported | Controller |
|----------------------|--------------------|--------------------|--|
| 400GB 6G SAS SLC SFF | Up to 8 | 1-8 | HP Smart Array P212/Zero Memory Controller |
| 200GB 6G SAS SLC SFF | | | HP Smart Array P212/256 MB Controller |
| | | | HP Smart Array P410/256 MB Controller |
| | | | HP Smart Array P410/512 MB BBWC Controller |
| | | | HP Smart Array P410/512 MB FBWC Controller |
| | | | HP Smart Array P410/1G FBWC Controller |
| | | | HP Smart Array P411/256MB Controller |
| | | | HP Smart Array P411/512MB with BBWC Controller |
| | | | HP Smart Array P411/512MB Flash Backed Write Cache |
| | | | HP Smart Array P411/1G Flash Backed Write Cache |
| | | | HP Smart Array P812/1G Flash Backed Cache Controller |

External Storage

| | Quantity Supported | Position Supported | Host Controller or Adapter |
|------------------------|--------------------|--------------------|--|
| 70 Modular Smart Array | Up to 4 | External | HP Smart Array P411/256 MB Controller |
| | | | HP Smart Array P411/512 MB BBWC Controller |
| | | | HP Smart Array P812/1G Flash Backed Cache Controller |
| D2600 Disk Enclosure | Up to 8 | External | HP Smart Array P411/256MB BBWC Controller |
| | | | HP Smart Array P411/512 MB BBWC Controller |
| | | | HP Smart Array P812/1G Flash Backed Cache Controller |
| D2700 Disk Enclosure | Up to 4 | External | HP Smart Array P411/256 MB Controller |
| | | | HP Smart Array P411/512 MB BBWC Controller |
| | | | HP Smart Array P812/1G Flash Backed Cache Controller |

Maximum Storage Capacity - (External SAS Enclosure Attached)

| | |
|----------|--|
| Internal | 8.0TB (8 x 1TB SFF SAS/SATA Drives) |
| External | 960TB (80 MSA60 enclosures x 12 drive bays each x 1TB SATA Drives) |

Tape and Disk-Based Backup

NOTE: For the complete range of tape drives, autoloaders, libraries and media, including the internal fitting models, see: <http://www.hp.com/go/tape>. For the complete range of D2D Backup Systems see: <http://www.hp.com/go/d2d>. For the complete range of RDX drives and media see: <http://www.hp.com/go/rdx>. For hardware and software compatibility of HP disk and tape backup products see: <http://www.hp.com/storage/SPOCK>.



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Storage

| | Position | Recommended Controller | Controller Part Number |
|--|----------|---|------------------------|
| HP SCSI Tape Drives LTO-1 Ultrium 232 LTO-2 Ultrium 448 LTO-3 Ultrium 920 LTO-3 Ultrium 960 LTO4 Ultrium 1760 LTO-4 Ultrium 1840 DAT 40 DAT 72 DAT 160 1U Rack-Mount Kit 3U Rack-Mount Kit | External | HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter | 412911-B21 |
| HP USB Tape Drives DAT 40 DAT 72 DAT 160 DAT 320 1U USB Rack-Mount Kit | External | USB 2.0 Port | N/A |
| HP SAS Tape Drives DAT 160 DAT 320 LTO-2 Ultrium 448 LTO-3 Ultrium 920 LTO-4 Ultrium 1760 LTO-4 Ultrium 1840 LTO-5 Ultrium 3000 LTO-5 Ultrium 3280 1U Rack-Mount Kit 3U Rack-Mount Kit | External | HP Smart Array P212/ZM 1-ports Int/1-ports Ext PCIe x8 SAS Controller | 462828-B21 |
| HP SCSI Tape Autoloaders DAT 72x10 Autoloader 1/8 G2 Autoloader | External | HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter | 412911-B21 |
| HP SCSI Tape Libraries, External MSL2024 MSL4048 MSL8096 MSL6000 | External | HP U320e SCSI Dual Channel Host Bus Adapter | AH627A |



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Storage

| | | | |
|--|----------|---|------------|
| HP SAS Tape Autoloaders and Libraries 1/8 G2 Autoloader MSL2024 MSL4048 MSL8096 | External | HP Smart Array P212/ZM 1-ports Int/1-ports Ext PCIe x8 SAS Controller | 462828-B21 |
| HP Fibre Channel Tape Libraries MSL2024 MSL4048 MSL8096 MSL6000 | External | Please consult the EBS connectivity matrix at: http://www.hp.com/go/ebs for connectivity information and the supported Fibre Channel HBAs shown in this QuickSpec. | |
| HP USB RDX Removable Disk Backup System RDX160 RDX320 RDX500 RDX750 RDX1TB | External | USB 2.0 port | N/A |
| HP D2D Backup Systems, iSCSI D2D2500i D2D4000i | External | Embedded Network Controller. If the server requires a hardware iSCSI initiator, the QLogic QLA4050 Host Bus Adapter is recommended. | |
| HP D2D Backup Systems, Fibre Channel D2D4000fc | External | Direct server attach is not supported, requires connection via SAN fabric. See: http://www.hp.com/storage/SPOCK | |



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Power Specifications

| HP 1200W Common Slot Silver Hot Plug Power Supply Kit | | | | | | | |
|---|------------|------|------|------|------|------|------|
| Part Number | 500172-B21 | | | | | | |
| Input Voltage Range (V rms) | 100 to 240 | | | | | | |
| Frequency Range (Nominal) (Hz) | 50/60 | | | | | | |
| Nominal Input Voltage (Vrms) | 100 | 120 | 200 | 208 | 220 | 230 | 240 |
| Maximum Rated Output Wattage Rating | 800 | 900 | 1200 | 1200 | 1200 | 1200 | 1200 |
| Nominal Input Current (A rms) | 9.7 | 9.0 | 7.0 | 6.8 | 6.4 | 6.1 | 5.9 |
| Maximum Rated Input Wattage Rating (Watts) | 930 | 1034 | 1348 | 1348 | 1348 | 1348 | 1348 |
| Maximum Rated VA (Volt-Amp) | 970 | 1079 | 1406 | 1406 | 1406 | 1406 | 1406 |
| Efficiency (%) | 86 | 86 | 89 | 89 | 89 | 89 | 89 |
| Power Factor | 0.97 | | | | | | |
| Leakage Current (mA) | 0.42 | 0.50 | 0.83 | 0.87 | 0.92 | 0.96 | 1.00 |
| Maximum Inrush Current (A peak) | 30 | | | | | | |
| Maximum Inrush Current duration (mS) | 20 | | | | | | |
| Maximum British Thermal Unit Rating (BTU-Hr) | 3174 | 3530 | 4600 | 4600 | 4600 | 4600 | 4600 |

| HP 1200W Common Slot Platinum Hot Plug Power Supply Kit | | | | | | | |
|---|------------|------|------|------|------|------|------|
| Part Number | 578322-B21 | | | | | | |
| Input Voltage Range (V rms) | 100 to 240 | | | | | | |
| Frequency Range (Nominal) (Hz) | 50/60 | | | | | | |
| Nominal Input Voltage (Vrms) | 100 | 120 | 200 | 208 | 220 | 230 | 240 |
| Maximum Rated Output Wattage Rating | 800 | 900 | 1200 | 1200 | 1200 | 1200 | 1200 |
| Nominal Input Current (A rms) | 9.3 | 8.6 | 6.7 | 6.5 | 6.1 | 5.8 | 5.6 |
| Maximum Rated Input Wattage Rating (Watts) | 889 | 989 | 1290 | 1290 | 1290 | 1290 | 1290 |
| Maximum Rated VA (Volt-Amp) | 927 | 1031 | 1345 | 1345 | 1345 | 1345 | 1345 |
| Efficiency (%) | 90 | 91 | 93 | 93 | 93 | 93 | 93 |
| Power Factor | 0.97 | | | | | | |
| Leakage Current (mA) | 0.42 | 0.50 | 0.83 | 0.87 | 0.92 | 0.96 | 1.00 |
| Maximum Inrush Current (A peak) | 30 | | | | | | |
| Maximum Inrush Current duration (mS) | 20 | | | | | | |
| Maximum British Thermal Unit Rating (BTU-Hr) | 3033 | 3375 | 4403 | 4403 | 4403 | 4403 | 4403 |

NOTE: To review typical system power ratings use the HP Power Advisor which is available online located at url: www.hp.com/go/proliant-energy-efficient or www.hp.com/go/hppoweradvisor



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Technical Specifications

| | | | |
|---|---|---|---|
| System Unit | Dimensions (H x W x D) (with bezel) | 6.94" x 19.0" x 27.55" (17.6cm x 48.3cm x 70.0cm) | |
| | Weight (approximate) | Maximum | 100.0 lb (45.4 kg) (all hard drives, power supplies, DIMMs and processors installed) |
| | | Minimum | 66.0 lb (30.0 kg) (one hard drive, two power supplies, four DIMMs, and two processors installed) |
| Input Requirements (per power supply) | Input Requirements (per power supply) | Rated Line Voltage | 100 - 127 VAC, 200 - 240 VAC |
| | | Rated Input Current | 12 A (at 100 VAC), 8 A (at 200 VAC) |
| | | Rated Input Frequency | 50 to 60 Hz |
| | | Rated Input Power | 1161 W (at 100 VAC), 1598 W (at 240 VAC) |
| BTU Rating | Maximum | 3960 BTU/hr (at 100 VAC), 5450 BTU/hr (at 200 VAC) | |
| Power Specifications | <p>NOTE: To review typical system power ratings use the HP Power Advisor which is available online located at url: www.hp.com/go/proliant-energy-efficient or www.hp.com/go/hppoweradvisor</p> <ul style="list-style-type: none"> - Click on the system of interest. Example: DL580 G7 - Follow the instructions of the next screens. | | |
| Power Supply Output (per power supply) | Rated Steady-State Power | 910 W (low line), 1300 W (high line) | |
| | Maximum Peak Power | 910 W (low line), 1300 W (high line) | |
| System Inlet Temperature | Operating | 10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed. System performance may be reduced if operating with a fan fault or above 30°C (86°F). | |
| | Non-operating | -30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr). | |
| Relative Humidity (non-condensing) | Operating | 10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing. | |
| | Non-operating | 5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing. | |



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Technical Specifications

| | | |
|---------------------------------------|--|---|
| Altitude | Operating | 3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min). |
| | Non-operating | 9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min). |
| Acoustic Noise | Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). | |
| | Idle | |
| | L WAd | 6.4 B (with PCI-E) |
| | L pAm | NA dBA |
| | Operating | |
| | L WAd | 6.8 B (with PCI-E) |
| | L pAm | NA dBA |
| Emissions Classification (EMC) | FCC Rating | Class A |
| | Normative Standards | CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1 |

NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.

| | | |
|---|---------------------------------|--|
| Integrated Lights-Out 3 (iLO 3) integrated on system board | Architecture | PCI Express based health and remote management ASIC |
| | Processor | PCI Express RISC processor core running at 250MHz |
| | Upgradeability | Option firmware upgradeable via Flash ROM. |
| | Interfaces | One Ethernet Sideband connection (10/100/1000 Mb/s) |
| | | One Ethernet network connection (10/100Mb/s) |
| | Memory | 128-MB RAM with ECC |
| | Operating System Support | Microsoft Windows 2008 R2 |
| | | Microsoft Windows 2008 (32 bit and 64 bit) |
| | | Microsoft Windows Server 2008 Standard Edition (32bit and 64bit) |
| | | Microsoft Windows Server 2008 Enterprise Edition (32bit and 64bit) |
| Microsoft Windows Server 2003 and Windows Server 2003 R2, and Windows Server 2003 for Extended Systems Standard Edition, Enterprise Edition | | |
| Red Hat Enterprise Linux 5.4 (32 bit and 64 bit) | | |
| SUSE LINUX Enterprise Server 11 (32bit and 64bit) | | |
| SUSE LINUX Enterprise Server 10 (32bit and 64bit) | | |
| | VMware ESX 4.0 | |



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Technical Specifications

| | |
|---------------------------------------|---|
| | VMware ESX 3.5.0 |
| | Solaris |
| Client System Support | Microsoft Windows 7 Microsoft Windows XP Professional Edition Microsoft Windows Vista Business and Ultimate Editions Red Hat Enterprise Desktop 5.00 SUSE Linux Enterprise Desktop 11 SUSE Linux Enterprise Desktop 10 |
| Client Browser Support | Microsoft Internet Explorer 8 Microsoft Internet Explorer 7 Microsoft Internet Explorer 6 Firefox 3.5 (on supported Windows and Linux systems) Firefox 3.0 (on supported Windows and Linux systems) |
| Command Line Support | Secure Shell and serial port access Secure Socket Layer Secure Shell version 2 |
| Security | Advanced Encryption Standard (AES) and Triple Data Encryption Standard (3DES) on browser, CLP and XML scripting interface AES encryption of video RC4 encryption of video |
| Directory Support Services | Active Directory v1.0 (Windows 2003) |
| Driver Support | HP ProLiant iLO3 Management Controller Driver Package |
| Management protocols supported | SNMP, IPMI 2.0 (system and LAN interface), DMTF Systems Management Architecture for Server Hardware Command Line Protocol (SMASH CLP), HP RIBCL XML |

| | | |
|-------------------------------------|---|---|
| Smart Array P410i Controller | Dimensions | Embedded |
| | Disk Drive and Enclosure Interface - Transfer rate | 6Gb/s SAS (Serial Attached SCSI) 3Gb/s SATA (Serial ATA) |
| | SAS Connectors | 2 internal 4X connectors |
| | Cache Memory Speed | DDR2-800MHz with 40 or 72-bit wide bus |
| | Server Interface | x4 PCIe 2.0 provides 2GB/s maximum bandwidth |
| | SAS Speed | 8 6Gb/s SAS links provide 4.8GB/s maximum bandwidth |
| | Cache Memory | Zero Memory RAID has no cache memory 40-bit 256MB ECC protected cache (battery upgrade available) 72-bit 512MB BBWC or 72-bit 512MB and 1G FBWC |
| | Logical Drives Supported | Zero Memory, Up to 2 logical volumes (8 physical drives) Up to 64 logical drives with cache |
| | Host Memory Addressing | 64-bit, supporting greater than 4GB server memory space |
| | RAID Support | RAID 6, 6+0 (Advanced Data Guarding) NOTE: RAID 6, 6+0 can be enabled with one of the following combinations: |



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Technical Specifications

- 256 MB cache, Battery kit and Smart Array Advanced Pack License key option upgrades
- 512 MB BBWC/FBWC and Smart Array Advanced Pack License key option upgrades
- 1G FBWC and Smart Array Advanced Pack License key option upgrades

RAID 5, 5+0 (Distributed Data Guarding)

NOTE: A minimum of 256 MB cache is required to enable RAID 5, 5+0 support

RAID 1+0 (Striping & Mirroring)

RAID 0 (Striping), RAID 1 (Mirroring)

| | | | |
|---|-----------------------|---|---------|
| HP NC375i Integrated Quad Port Gigabit Server Adapter | Network Interface | 10Base-T/100Base-TX/1000Base-TX | |
| | Compatibility | IEEE 802.3 10Base-T | |
| | | IEEE 802.3ab 1000Base-T | |
| | | IEEE 802.3u 100Base-TX | |
| | | IEEE 802.3ad 1000Base-TX | |
| | | IEEE 802.1p 100Base-TX | |
| | | IEEE 802.1q 100Base-TX | |
| | Data Transfer Method | PCI-Express 2.0 x8 | |
| | Controller | Qlogic/NetXen NX3031 | |
| | Network Transfer Rate | 10Base-T (Full-Duplex) | 20 Mb/s |
| 100Base-TX (Full-Duplex) | | 200 Mb/s | |
| 1000Base-TX (Full-Duplex) | | 2000 Mb/s | |
| Connector | RJ-45 | | |
| Cable Support | 10Base-T | Categories 3, 4, or 5 UTP; up to 328 ft (100 m) | |
| | 100Base-TX | Category 5 or higher UTP; up to 328 ft (100 m) | |
| | 1000Base-TX | Category 5 or higher UTP; up to 328 ft (100 m) | |

| | | |
|--|--------------------------------------|--|
| Environment-friendly Products and Approach | End-of-life Management and Recycling | Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: http://www.hp.com/go/green . To recycle your product, please go to: http://www.hp.com/go/green or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner. |
|--|--------------------------------------|--|

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.



QuickSpecs

HP ProLiant DL580 Generation 7 (G7)

Technical Specifications

© Copyright 2012 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Unix is a registered trademark of The Open Group.

Intel, the Intel logo, Xeon and Xeon Inside are trademarks of Intel Corporation in the U.S. and other countries.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.

SOLO NETWORK

